

IPGS-5424-PT

24 10/100/1000T PoE + 4 DualSpeed SFP IEC 61850-3

Managed Ethernet Switch w/ Enhanced Ring & MMS

- Compliant with IEC61850-3 & IEEE1613
- Support IEEE802.3at/af up to 30W per port
- PoE management incl. Detection and Scheduling
- Built-in MMS server based on IEC61850-90-4 switch data modeling for SCADA with monitoring and control
- IEC packet counter for GOOSE monitoring
- QoS for GOOSE packet**
- Enhanced G.8032 ring protection < 20ms for single ring. Supports auto mode, enhanced mode, train mode, multi-VLAN and basic mode; Enhanced G.8032 ring covers multicast packets; MSTP 16MSTI /RSTP ; support MRP ring**
- Miss-wiring avoidance & node failure protection
- User friendly UI, including auto topology drawing; Complete CLI
- Support LACP link aggregation, IGMP v3/router port, DHCP server & DHCP Option82; Port based DHCP distribution, Mac based DHCP server, QoS by VLAN, SSH/SSL, HTTPS, INGRESS/EGRESS ACL L2/L3, TACACS+*, QinQ**, SMS**
- Protocol based VLAN** ; IPv4/IPv6 Subnet based VLAN**
- Optional InstaView** for centralized backup, editing the configuration file and upgrade firmware
- Environmental Monitoring for temp, voltage & current
- USB slot for edited restoration and auto backup



OVERVIEW

Lantech IPGS-5424-PT is a high performance L2+ (Gigabit uplink) PoE managed Ethernet switch with 24 10/100/1000T PoE + 4 Dual Speed SFP that complies with IEC 61850-3 & IEEE 1613. It delivers ITU G.8032 enhanced ring recovery less than 20ms in single ring while also supports train ring, enhanced mode, multiple VLAN model with easy configuration.

The built-in MMS server allows SCADA to control & monitor switch for data modeling.

GOOSE monitoring packet counter; Built-in MMS server for IEC61850 data modeling for monitoring and control; Optional QoS for GOOSE packet

The exclusive GOOSE monitoring function (IEC packet) can display the counter of GOOSE message transmitted and received by port.

The built-in MMS (Manufacturing Messaging Specification) server can help SCADA to monitor and control switch by data modeling. It covers system, power, port status, environmental monitoring, network configuration.

Optional QoS scheme for Goose packet to ensure low latency in the data patch.

Compliant with 802.3af/at standard, the Lantech IPGS-5424-PT is able to feed each PoE port up to 30 Watts@54 VDC providing the connected PD devices. Lantech IPGS-5424-PT supports advanced PoE management including PoE detection and scheduling. PoE detection can detect if the connected PD hangs then restart the PD; PoE scheduling is to allow pre-set power feeding schedule upon routine time table. Each PoE ports can be Enabled/disabled, get the voltage, current, Watt, and temperature info displayed on WebUI.

Miss-wiring avoidance, Repowered auto ring restore, Loop protection

The IPGS-5424-PT also embedded several features for stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech IPGS-5424-PT is able to alert with the LED indicator and disable ring automatically. Repowered auto ring restore function (node failure protection) ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. This feature prevents the broken ring and keep ring alive without any re-configuration needed. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

Enhanced G.8032 ring, 16 MSTI MSTP; Optional MRP ring**

Lantech IPGS-5424-PT features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering Multicast packets. It also supports various ring topologies that covers double ring, multi-chain (under enhanced ring), train ring, basic ring, multiple-VLAN ring and auto-ring with easy setup. The innovative auto-Ring configurator (auto mode) can calculate owner and neighbor in one step. It supports MSTP that allows spanning tree over VLAN for redundant links with 16 MSTI.

DHCP option 82 & Port based, Mac based DHCP, Option66, IPv6 DHCP server**

DHCP option 82 and Port based DHCP function can offer the same IP address on port base or VLAN base where there is need to replace the new device connecting to Lantech switches to avoid any network disruption. The built-in DHCP Option 82 server offers the convenience of policy setting on the switch. Mac based DHCP server function assigns an IP address according to its MAC address to include dumb switches in DHCP network. DHCP option 66 is also supported. Optional IPv6 address resolution for DHCP server can be supported

QoS by VLAN for legacy devices

QoS by VLAN can allow switch to tag QoS by VLAN regardless the devices acknowledge QoS or not in which greatly enhance the bandwidth management in a network.

QinQ, QoS QinQ** and GVRP** supported**

It supports the QinQ**, QoS QinQ**, GVRP** for large VLAN segmentation.

IGMPv3, GMRP, router port, static multicast forwarding and multicast Ring protection**

The unique multicast protection under enhanced G.8032 ring can offer immediate self-recovery instead of waiting for IGMP table timeout. It also supports IGMPv3, GMRP**, router port and static multicast forwarding binding by ports for video surveillance application.

User friendly GUI, Auto topology drawing

The user friendly UI, innovative auto topology drawing and topology demo makes IPGS-5424-PT much easier to get hands-on. The IPGS-5424-PT supports DMI interface that can correspond with DDM SFPs (Digital diagnostic monitor) to display the five parameters in Lantech's UI, including optical output power, input power, temperature, laser bias current and transceiver supply voltage***. The TX power/RX power raw data is automatically converted to dB values for installer, making it easier to calculate the fiber distance. The complete CLI enables professional engineer to configure setting by command line.

Editable configuration file; USB port for configuration upload & download; InstaView for mass deployment**

The configuration file of Lantech IPGS-5424-PT can be exported and edited with word processor for the other switches configuration with ease. The factory reset button can restore the setting back to factory default and built-in watchdog design can automatically reboot the switch when CPU is found dead.

The built-in USB port can have configuration upload & download by USB dongle.

With optional InstaView, the configuration files can be mass backup, mass-editable deployed and auto upgrading firmware in batch make maintenance easy.

Event log & message; 2 DI / 2 DO

In case of event, the IPGS-5424-PT is able to send an email & SMS** text message to pre-defined addresses as well as SNMP Traps our immediately. It provides 2 DI and 2 DO. When disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the alarm while sending alert information to IP network with email and traps.

Environmental monitoring for switch inside information

The environmental monitoring can detect switch overall temperature, voltage and current where can send the SNMP traps, email and SMS** alert when abnormal.

Design with Dual powered input; Relay contact alarm

Lantech IPGS-5424-PT supports dual power inputs from DC12~56V, 85~264VAC or 100V~370VDC. It supports PoE power inputs from DC45~56V with dual system power. Featured with relay contact alarm function, the IPGS-5424-PT is able to connect with alarm system in case of power failure. The IPGS-5424-PT also provides $\pm 4000V$ EFT, $\pm 4000V$ Surge and $\pm 8000V$ ESD protection, which can reduce unstable situation caused by power line and Ethernet.

Industrial hardened design for extended temperature operation


Lantech IGS-5424-PT features high reliability and robustness withstanding extensive EMI/RFI phenomenon, lighting surge, inductive load switching, high ESD, high fault current environment, environmental vibration and shocks usually found in factory, substation, steel automation, aviation, mining and process control. It is the best solution for Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory and assembly lines.

Lantech IPGS-5424-PT can run under widely operational temperature (-40°C~75°C) in the harsh environment.

FEATURES & BENEFITS

- **System Interface/Performance**
 - IEC-61850 & IEEE1613 Compliance
 - 24x10/100/1000T PoE at/af+ 4 100M/1000M SFP L2+
 - 16K MAC Address Table
 - Dual Power Supply Design for DC(12V~56VDC)
 - Dual PoE power input with budget up to 720W
 - FAN less design
- **Back-plane (Switching Fabric): 56 Gbps**
- **Built-in MMS server for SCADA data-modeling with control and monitoring**
 - System info
 - Power
 - Device event report
 - Port status
 - Port statistic
 - Port event report
 - Firmware upgrade
 - Network configuration
- **Embedded 24 PoE Injectors IEEE802.3af/at function to feed power up to 30W@54V; 15W @ 48V per port for active operation**
- **PoE management including PoE detection and scheduling for PD (power devices)**
- **Optional QoS for Goose packet**
- **10KB Jumbo frame**
- **User friendly UI, Auto topology drawing, topology demo, Complete CLI for professional setting**
- **Enhanced G.8032 Ring recovery < 20ms in single ring**
 - Support various ring/chain topologies, including train ring, enhanced ring, basic ring, auto ring & multiple VLAN ring
 - Enhanced G.8032 ring configuration with ease
 - Auto ring configuration(auto mode) for single ring
 - Covers multi-cast and data packets
- **DDM to support SFP diagnostic function*****
 - Automatically convert the raw data into dB values for TX power/RX power, making it easier to measure the fiber distance
- **Provides EFT protection ±4000 VDC for power line.**
- **Supports ±8000 VDC ESD air protection**
- **±4000V Surge for signal port**
- **Provides 8 priority queues Port base, Tag Base and Type of Service Priority**
- **IEEE 802.1d STP, IEEE 802.1w RSTP,802.1s MSTP VLAN redundancy with 16 MSTI**
- **4K 802.1Q VLAN, Port based VLAN, GVRP**, QinQ**, QoS QinQ****
- **Supports IEEE 802.1ab LLDP, Cisco CDP; LLDP info can be viewed via Web/ Console/ Lantech™ InstaView****
- **DHCP server / client / DHCP Option 82 relay / DHCP Option 82 server Port based DHCP server; DHCP**
- Option 66; IPv6 address resolution for DHCP server****
- **Mac based DHCP server to assign IP address that includes dumb switches in DHCP network**
- **Bandwidth Control**
 - Ingress packet filter and egress rate limit
 - Broadcast/multicast packet filter control
- **Relay alarm output system events**
- **Miss-wiring avoidance**
 - LED indicator
- **Repowered auto ring restore**
 - Ensure the switches in a ring to survive after power breakout is back
 - The status can be shown in NMS when each switch is back
- **TFTP/ SFTP**/HTTP firmware upgrade; Lantech™ InstaView** for multiple upgrade**
- **Configuration backup and restoration**
 - Supports text configuration file for system quick installation
 - USB port for upload / download configuration by USB dongle
 - InstaView** for centralized configuration deployment, backup & upgrade
- **System Event Log, SMTP Email alert, SMS** mobile (text) and SNMP Trap for alarm support; 32 RMON counters**
- **Security**
 - SSL/SSH/INGRESS/EGRESS ACL L2/L3
 - Port Security: MAC address entries/Filter/MAC-Port binding
 - IP Security: IP address security management to prevent unauthorized intruder.
 - TACACS+*
 - Login Security: IEEE802.1X/RADIUS
 - HTTPS for secure access to the web interface
- **Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application**
- **Multicast static route for non- IGMP camera to prevent flooding; IGMP router port to assign query in ring for reversed multicast video flow**
- **IGMPv1,v2,v3 with Query mode for multimedia; GMRP****
- **Factory reset button to restore setting to factory default**
- **Watchdog design to auto reboot switch CPU is found dead**
- **Environmental monitoring for system input voltage, current, ambient temperature**
- **Supports DIDO (2 Digital Input / 2 Digital Output)**
- **IP30 metal housing with DIN rail and Wall-mount** design**

DIMENSIONS (unit=mm)

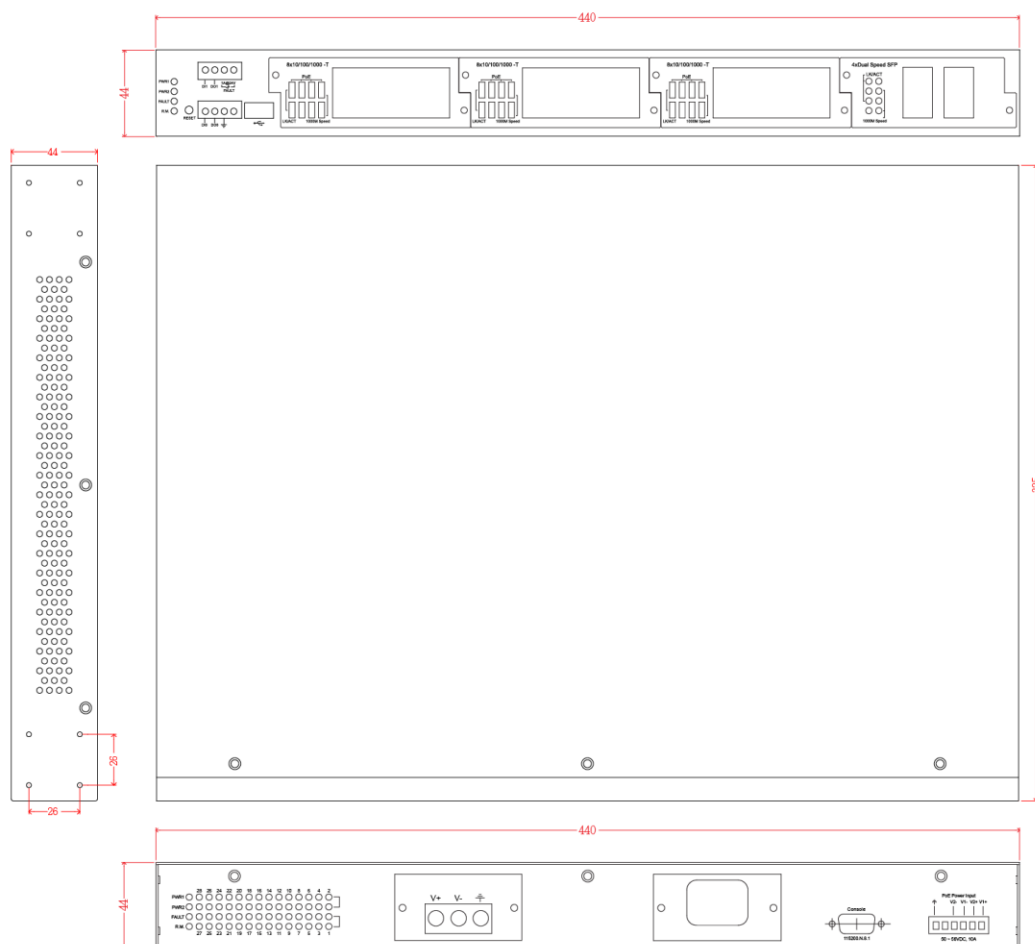

SPECIFICATION

Hardware Specification							
IEEE Standards	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Ethernet IEEE 802.3ab 1000Base-T Ethernet IEEE 802.3z Gigabit Fiber IEEE 802.3x Flow Control Capability ANSI/IEEE 802.3 Auto-negotiation IEEE 802.1Q VLAN IEEE 802.1p Class of Service IEEE 802.1X Access Control IEEE 802.1D Spanning Tree IEEE 802.1w Rapid Spanning Tree IEEE 802.1s Multiple Spanning Tree IEEE 802.3ad Link Aggregation Control Protocol (LACP) IEEE 802.1AB Link Layer Discovery Protocol (LLDP) IEEE 802.1x User Authentication (Radius) IEEE 1588 Precision Time Protocol v2 IEEE 802.3t/af Power Over Ethernet						
Switch Architecture	Back-plane (Switching Fabric): 56Gbps						
Transfer Rate	14,880pps for Ethernet port						
	148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet / Gigabit Fiber port						
MAC Address	16K MAC address table						
Jumbo frame	10KB						
PoE pin assignment	RJ-45 port # 1~# 24 support PoE at/af End-point, Alternative A mode. Per port provides up to 30W@54V capability. Positive (VCC+): RJ-45 pin 1,2. Negative (VCC-): RJ-45 pin 3,6.						
PoE input voltage & Power feed voltage	<table border="1"> <tr> <th>Input V</th><th>Active Mode A /Output V</th></tr> <tr> <td>45~56V(af)</td><td>48V@15W</td></tr> <tr> <td>54~56V(at)</td><td>54V@30W</td></tr> </table>	Input V	Active Mode A /Output V	45~56V(af)	48V@15W	54~56V(at)	54V@30W
Input V	Active Mode A /Output V						
45~56V(af)	48V@15W						
54~56V(at)	54V@30W						
Connectors	24 10/100/1000T RJ-45 with auto MDI/MDI-X function 4 100M / 1000M Mini-GBIC : SFP sockets RS-232 console: Female DB-9 USB for backup and restore						
LED	Per unit: Power 1 (Green), Power 2 (Green), Alarm (Red) ,R.M (Green) Link/Activity (Green), Full duplex/collision(Yellow)), MINI GBIC (Link/Activity)(Green)						

Datasheet Version 4.0

Power Supply	DC model: 12~56VDC INPUT X1 PoE power: dual input for 45~57VDC Additional power socket (optional): 85-264VAC, 100-370VDC 36-75VDC 85-264VAC IEC320 12-56VDC
Power Consumption	Full load: 30W/ Unload: 13W
PoE Power Budget	720W
Relay Alarm	Provides one relay output for port breakdown, power fail and alarm. Alarm Relay current carry ability: 1A @ DC24V
DI/DO	2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 40 VDC, 200mA
Case Dimension	19" Metal case,IP-30; 440mm(W)x325mm(D)x44mm(H)
Operating Humidity	5%~95% (Non-condensing)
Operating Temperature	-40°C ~75°C
Storage Temperature	-40°C ~85°C
EMI & EMS	FCC Class A, CE EN55032, CE EN55024, CE EN61000-4-2, CE EN61000-4-3, CE EN61000-4-4, CE EN61000-4-5, CE EN61000-4-6, CE EN61000-4-8, CE EN61000-6-4, CE EN61000-6-2
Stability Testing	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-64 (Vibration)
Railway verification	EN50121-4 , EN55022 (EMV), EN50125-3 (environmental conditions)
Substation Verification	IEC 61375
MTBF	586,450hrs (standards: IEC 62830)
Warranty	5 years

Software Specification

Management	SNMP v1 v2c, v3/ Web/Telnet/CLI Management
SNMP MIB	RFC 1215 Traps MIB, RFC 1213 MIBII RFC 1158 MIBII RFC 1157 SNMP MIB, RFC 1493 Bridge MIB, RFC 1573 IF MIB RFC 2674 VLAN MIB, Partial RFC 1643 EtherLike, Partial RFC 1757 RMON, RFC 2674 Q-Bridge MIB RFC 2790 Host Resource MIB LLDP MIB* RSTP MIB* Private MIB
ITU G.8032	Support ITU G.8032 for Ring protection in less than 20ms for self-heal recovery (incl. multicast packets) Support various ring/chain topology IES Includes multi-ring & multi-VLAN ring Enhanced G.8032 ring configuration with ease Ring covers multicast on different ports
PoE Management	1. PoE Detection to check if PD hangs then restart the PD

	2. PoE Scheduling to On/OFF PD upon routine time table 3. Per port PoE status including voltage, current, watt and PoE temperature
MMS Data Modeling	- System info - Environmental monitoring - Power - Device event report - Port status - Port statistic - Port event report - Firmware upgrade - Network configuration
QoS for Goose**	- Weighted fair queuing - Strict priority
User friendly UI	- Auto topology drawing - Topology demo - Auto configuration for G.8032(auto mode) for single ring - DDM threshold monitoring with dB values*** - Complete CLI for professional setting
Port Trunk with LACP	LACP Port Trunk: 8 Trunk groups
LLDP	Supports LLDP to allow switch to advise its identification and capability on the LAN
CDP	Cisco Discovery Protocol for topology mapping
VLAN	Port Based VLAN IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096.) GVRP**, QinQ**, QoS QinQ**, Protocol based VLAN** ; IPv4/IPv6 Subnet based VLAN**
IPv6/v4	Present
RSTP/MSTP	Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree with 16 MSTI
Quality of Service	The quality of service determined by port, Tag and IPv4 Type of service, IPv4 Differentiated Services Code Points - DSCP
Class of Service	Support IEEE802.1p class of service, per port provides 8 priority queues
QoS by VLAN	Tagged QoS by VLAN for all devices in the network
IP Security	Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder.
Login Security	Supports IEEE802.1X Authentication/RADIUS
Port Mirror	Support 3 mirroring types: "RX, TX and Both packet"
Network Security	Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder. 802.1X access control for port based and MAC based authentication/MAC-Port binding Ingress/Egress ACL L2/L3 SSL/ SSH for Management HTTPS for secure access to the web interface TACACS+ for Authentication
IGMP	Support IGMP snooping v1,v2,v3; Supports IGMP static route; 1024 multicast groups; IGMP router port ; IGMP query; GMRP**
Static MAC-Port bridge	Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application
Bandwidth Control	Support ingress packet filter and egress packet limit. The egress rate control supports all of packet type. Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only

	and all types of packet. The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress packet limit.
Flow Control	Support Flow Control for Full-duplex and Back Pressure for Half-duplex
System Log	Support System log record and remote system log server
SMTP/Text SMS**	Supports SMTP Server and 8 e-mail accounts for receiving event alert; can send SMS** text alert via mobile
Relay Alarm	Provides one relay output for port breakdown, power fail and alarm. Alarm Relay current carry ability: 1A @ DC24V
Protection	- Miss-wiring avoidance - Repowered auto ring restore - Loop protection
SNMP Trap	Up to 10 trap stations; trap types including: - Device cold start - Authorization failure - Port link up/link down - DI/DO open/close - Typology change(ITU ring) - Power failure - PoE port event - Environmental abnormal**
DHCP	Provide DHCP Client/ DHCP Server/DHCP Option 82

	relay/ server
Mac based DHCP Server	Assign IP address by Mac that can include dumb switch in DHCP network
DNS	Provide DNS client feature and support Primary and Secondary DNS server.
SNTP	Supports SNTP to synchronize system clock in Internet
Environmental Monitoring	Internal sensor to detect temperature, voltage and current and send SNMP traps, SMS and emails if any abnormal events
Firmware Update	Supports TFTP/SFTP** firmware update, TFTP backup and restore; HTTP firmware upgrade; Lantech™ InstaView** for multiple upgrade
Configuration backup & restore	Supports text configuration file for system quick installation USB port to upload/download firmware by USB dongle Optional InstaView for mass backup, editing configuration and upgrade

*Future Release

**Optional

***Optional DDM SFP required

ORDERING INFORMATION

- **IPGS-5424-PT-DC.....P/N: 8388-601**
24 10/100/1000T POE at/af + 4 Dual SFP L2 plus Industrial Switch
Built-in 1x 12~56V DC + 1x additional power socket + 1x 48VDC PoE power input; -20°C to 60°C
- **IPGS-5424-PT-DC-E.....P/N: 8388-6011**
24 10/100/1000T POE at/af + 4 Dual SFP L2 plus Industrial Switch
Built-in 1x 12~56V DC + 1x additional power socket + 1x 48VDC PoE power input; -40°C to 75°C

OPTIONAL ACCESSORIES

Power

EOTH000701

Isolation Power 85-264VAC, 100-370VDC 1.5A , 47-63HZ



EOTH000702

Isolation Power 36-75VDC, 2.5A



EOTH000703

Power 85-264VAC IEC320 socket, 1.5A , 47-63HZ



EOTH000704

Power Input Module 12-56VDC, 2.5A

**DIN Rail Power**

- **NDR-480 Series** 480W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-240 Series** 240W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-120 Series** 120W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to derating curve on NDR-120 Series datasheet)
- **NDR-75 Series** 75W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to derating curve on NDR-120 Series datasheet)

Mini GBIC (SFP)

- | | |
|--|---|
| ■ 8330-162X MINI GBIC 1000SX (LC/MM/0.5KM) Transceiver | ■ 8330-187 1.25Gbps BiDi SFP 20KM Transceiver (WDM 1550) |
| ■ 8330-163X MINI GBIC 1000SX2 (LC/MM/2KM) Transceiver | ■ 8330-180 1.25Gbps BiDi SFP 40KM Transceiver (WDM 1310) |
| ■ 8330-165X MINI GBIC 1000LX (LC/SM/10KM) Transceiver | ■ 8330-182 1.25Gbps BiDi SFP 40KM Transceiver (WDM 1550) |
| ■ 8340-0591 MINI GBIC 1000LHX (LC/SM/40KM) Transceiver | ■ 8330-181 1.25Gbps BiDi SFP 60KM Transceiver (WDM 1310) |
| ■ 8330-166 MINI GBIC 1000XD (LC/SM/50KM) Transceiver | ■ 8330-183 1.25Gbps BiDi SFP 60KM Transceiver (WDM 1550) |
| ■ 8330-169 MINI GBIC 1000XD (LC/SM/60KM) Transceiver | ■ 8330-184 1.25Gbps BiDi SFP 80KM Transceiver (WDM 1490) |
| ■ 8330-167 MINI GBIC 1000ZX (LC/SM/80KM) Transceiver | ■ 8330-185 1.25Gbps BiDi SFP 80KM Transceiver (WDM 1550) |
| ■ 8330-170 MINI GBIC 1000EZ (LC/SM/120KM) Transceiver | ■ 8330-071 125Mbps BiDi SFP 2KM (WDM 1310) Transceiver |
| ■ 8330-168 MINI GBIC 10/100/1000T (100m) Transceiver | ■ 8330-072 125Mbps BiDi SFP 2KM (WDM 1550) Transceiver |
| ■ 8330-060 MINI GBIC 100Base (LC/MM/2KM) Transceiver | ■ 8330-069 125Mbps BiDi SFP 20KM (WDM 1310) Transceiver |
| ■ 8330-065 MINI GBIC 100Base (LC/MM/5KM) Transceiver | ■ 8330-068 125Mbps BiDi SFP 20KM (WDM 1550) Transceiver |
| ■ 8330-061 MINI GBIC 100Base (LC/SM/30KM) Transceiver | ■ 8330-080 125Mbps BiDi SFP 40KM (WDM 1310) Transceiver |
| ■ 8330-197 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1310) | ■ 8330-082 125Mbps BiDi SFP 40KM (WDM 1550) Transceiver |
| ■ 8330-198 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1550) | ■ 8330-081 125Mbps BiDi SFP 60KM (WDM 1310) Transceiver |
| ■ 8330-195 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1310) | ■ 8330-083 125Mbps BiDi SFP 60KM (WDM 1550) Transceiver |
| ■ 8330-196 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1550) | ■ 8330-084 125Mbps BiDi SFP 80KM (WDM 1310) Transceiver |
| ■ 8330-188 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310) | ■ 8330-085 125Mbps BiDi SFP 80KM (WDM 1550) Transceiver |
| ■ 8330-189 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1550) | ■ 8330-191 Dual Speed SFP 100M/1000M-LX 10KM Transceiver |
| ■ 8330-186 1.25Gbps BiDi SFP 20KM Transceiver (WDM 1310) | |

All SFP# ended with D are with DDM function

Lantech Communications Global Inc.

www.lantechcom.tw
 info@lantechcom.tw

© 2013 Copyright Lantech Communications Global Inc. all rights reserved.
 The revise authority rights of product specifications belong to Lantech Communications Global Inc.
 Lantech may make changes to specification and product descriptions at anytime, without notice.