

# R10L100-CHT2

## 10.4" Chassis Display



### KEY FEATURES


- 10.4", 1024x768
- VGA and HDMI input
- Chassis
- VESA mount



### SPECIFICATIONS

| Display             |                                                                                                                        |                       |                                                                                                                          |
|---------------------|------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------|
| Resolution          | 1024x768                                                                                                               | Size                  | 10.4 inches                                                                                                              |
| Contrast Ratio      | 1000:1                                                                                                                 | Panel Brightness      | 350 nits                                                                                                                 |
| Display Color       | 16.2M Colors                                                                                                           | View Angles           | 88,88,88,88                                                                                                              |
| Active Area         | 210.4x157.8 mm                                                                                                         | Touch / Glass         | Resistive Touch Screen<br>Protection Glass w/o Touch Function (Optional)<br>SAW Touch (Surface Acoustic Wave) (Optional) |
| Environment         |                                                                                                                        |                       |                                                                                                                          |
| Operating Humidity  | 10% to 90% (non-condensing)                                                                                            | Operating Temperature | 0~50°C                                                                                                                   |
| Storage Temperature | -10~60°C                                                                                                               |                       |                                                                                                                          |
| Certification       |                                                                                                                        |                       |                                                                                                                          |
| Certification       | CE, FCC                                                                                                                |                       |                                                                                                                          |
| IO Ports            |                                                                                                                        |                       |                                                                                                                          |
| USB Port            | 1 x USB for Touch Screen                                                                                               | Video                 | 1 x VGA<br>1 x HDMI (Optional)<br>1 x DVI (Optional)                                                                     |
| Audio               | Audio line in (3.5mm) (Optional)<br>2 x Speaker (Optional)                                                             |                       |                                                                                                                          |
| Mechanical          |                                                                                                                        |                       |                                                                                                                          |
| Dimension           | 259.6 x 196.6 x 45 mm                                                                                                  | Mounting              | VESA Mount                                                                                                               |
| Enclosure           | Metal Housing with Aluminum Bezel                                                                                      | Cooling System        | Fanless Design                                                                                                           |
| Accessory           |                                                                                                                        |                       |                                                                                                                          |
| Accessory           | 1 x VGA cable<br>1 x HDMI cable<br>100~240V AC to DC Adapter<br>Power Cord<br>Manual<br>VESA screws(Varies by product) | Optional Accessory    | Remote Controller (Optional,Varies by product)                                                                           |
| Power               |                                                                                                                        |                       |                                                                                                                          |
| Power Rating        | 12V DC input                                                                                                           |                       |                                                                                                                          |
| Control             |                                                                                                                        |                       |                                                                                                                          |

UNIT:MM

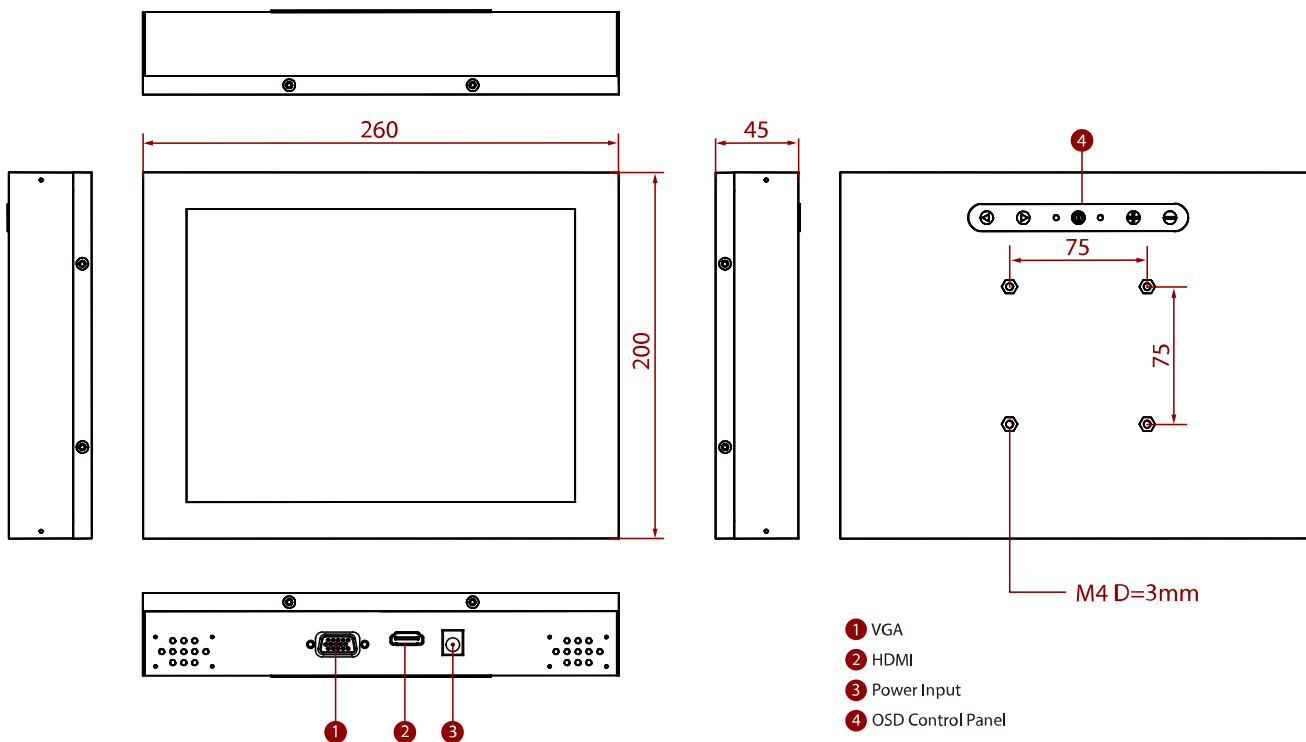

1. The mechanical drawing may change when adding a touch screen.
2. Please contact our sales representative if you need further product information.
3. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.