

IPGS-0016

16 10/100/1000T PoE at/af Industrial Unmanaged Ethernet Switch

- Support IEEE802.3af/at up to 30W per port
- Dual 9V~36VDC input compliant with ISO 7637-2* (24V model)
- Dual 44~56VDC input (48V model)
- Galvanic isolation protection (power input /Ethernet port to system/case ground; power input to Ethernet port)
- Max PoE budget 100W at 24V input; 240W at 48V input
- Relay alarm output for power fail and alarm
- E-marking* certificate for vehicle application (-24V model)



OVERVIEW

Lantech IPGS-0016 is a high performance 16 10/100/1000T industrial Ethernet switch with w/16 PoE 802.3af/at ports.

Galvanic isolation for dual 24V/48V wide input range

The IPGS-0016 supports IEEE802.3af/at standard which can feed HI-power up to 30W at each PoE port for big power consumption devices like PTZ IP camera, high power wireless AP etc.

The IPGS-0016-24V accepts power input 9~36VDC and is compliant with ISO 7637-2* which protects switch from being damaged by high voltage that could be found at vehicle cranky start.

48V model accept 45~56VDC power input and can feed 48V output for PoE feeding in vehicle at max 240W @48V input.

E-marking* certificate, High reliability and extended working temperature

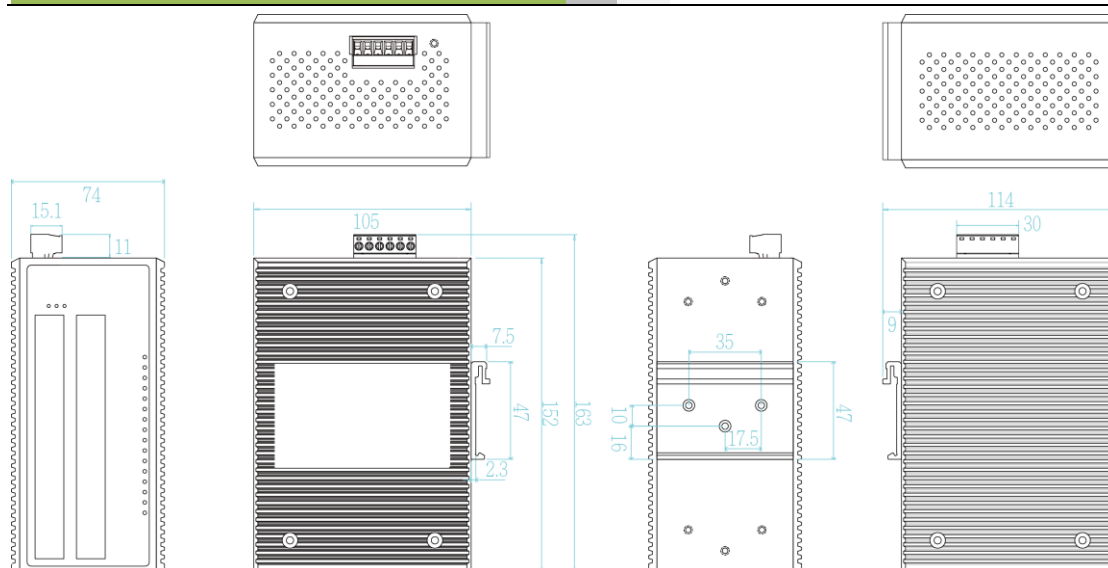
Lantech IPGS-0016 provides $\pm 2000V$ EFT and $\pm 6000V$ ESD protection, which can reduce unstable situation caused by power line and Ethernet. It has high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in Automation, transportation, Wireless backhaul, Semi-conductor factory and assembly lines.

The -E model can be used in extreme environments with an operating temperature range of -40°C to 75°C.

The E-marking* certificate makes it the most suitable switch for bus, carriage, other vehicles application as well as for industrial areas.

FEATURES & BENEFITS

- 16 10/100/1000T industrial Ethernet switch w/16 PoE 802.3af/at ports (Total 16 Ports Switch)
- PoE budget 100W at 24V input; 240W at 48V input
- Dual 9V~36VDC with ISO7637-2* compliance (24V model)
- Dual 44~56VDC input (48V model)
- Back-plane (Switching Fabric): 32Gbps
- Provides EFT protection $\pm 2000V$ VDC for power line
- Supports $\pm 6000V$ VDC Ethernet ESD protection
- Galvanic isolation between power input and system/case ground; between Ethernet port and system/case ground; between power input and Ethernet port
- E-marking* certificate for vehicle application (-24V model)
- Relay alarm output for power fail and alarm
- IP30 metal housing with DIN rail and Wall-mount** design

DIMENSIONS (unit=mm)

SPECIFICATION

Hardware Specification		PoE pin assignment	RJ-45 port # 1~#16 support IEEE 802.3at/af End-point, Alternative A mode. Per port provides up to 30W. (-14 model RJ-45 port # 1~#14 support IEEE 802.3at/af End-point, Alternative A mode. Per port provides up to 30W) Positive (VCC+): RJ-45 pin 1,2 Negative (VCC-): RJ-45 pin 3,6
Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3x Flow Control and Back Pressure IEEE802.3af/at Power over Ethernet	Power Consumption	15W exclude PoE loads
Switch Architecture	Back-plane (Switching Fabric): 32Gbps	Galvanic Isolation	Between power input and system/case ground Between Ethernet port and system/case ground Between power input and Ethernet port
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port	Case Dimension	Metal case IP-30 74 (W) x 105 (D) x 152 (H) mm
Mac Address	16K MAC address table	Weight	900 g
Connectors	10/100/1000T: 16 x ports RJ-45 with Auto MDI/MDI-X function Power & P-Fail connector: 1 x 6-pole terminal block	Installation	DIN Rail and Wall Mount** Design
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 1000Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)	Relay Alarm	Provides one relay output for power fail and alarm. Alarm Relay current carry ability: 1A @ DC24V
LED	Per unit: Power 1 (Green), Power 2 (Green), P-Fail (Red); Ethernet port: Link/Activity (Green)	EMI & EMS	FCC Class A, CE EN55011, CE EN55032, CE EN55024, CE EN61000-4-2, CE EN61000-4-3, CE EN61000-4-4, CE EN61000-4-5, CE EN61000-4-6, CE EN61000-4-8, CE EN61000-6-2, CE EN61000-6-4
Operating Humidity	5% ~ 95% (Non-condensing)	Stability Testing	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)
Operating Temperature	-20°C~60°C / -4°F~140°F (Standard model) -40°C~75°C / -40°F~167°F(-E model)	Vehicle certificate	E-Marking* with E13 granted approval (-24V model)
Storage Temperature	-40°C~85°C / -40°F~185°F	MTBF	908,270 hrs (standards: IEC 62380)
Power Supply	Dual 9~36VDC (24V model) Dual 44~56VDC (48V model)	Warranty	5 years
PoE Budget	240W at 48V input; 100W at 24V input; 80W at 12V input Higher PoE budget can be applied upon request. **		

*Future Release

**Optional

ORDERING INFORMATION

- **IPGS-0016-24V.....P/N: 8351-126**
16 10/100/1000T w/16 PoE at/af up to 30W Industrial Ethernet Switch, dual 9V~36VDC input; compliant with ISO7637-2*;
-20°C to 60°C
- **IPGS-0016-14-24V.....P/N: 8351-1261**
16 10/100/1000T w/14 PoE at/af up to 30W Industrial Ethernet Switch, dual 9V~36VDC input; compliant with ISO7637-2*;
-20°C to 60°C
- **IPGS-0016-48V.....P/N: 8351-1262**
16 10/100/1000T w/16 PoE at/af up to 30W Industrial Ethernet Switch, dual 44V~56VDC input; -20°C to 60°C
- **IPGS-0016-14-48V.....P/N: 8351-1263**

- 16 10/100/1000T w/14 PoE at/af up to 30W Industrial Ethernet Switch, dual 44V~56VDC input; -20°C to 60°C
- **IPGS-0016-24V-E.....P/N: 8351-127**
- 16 10/100/1000T w/16 PoE at/af up to 30W Industrial Ethernet Switch, dual 9V~36VDC input, compliant with ISO7637-2*;
-40°C to 75°C
- **IPGS-0016-14-24V-E.....P/N: 8351-1271**
- 16 10/100/1000T w/14 PoE at/af up to 30W Industrial Ethernet Switch, dual 9V~36VDC input, compliant with ISO7637-2*;
-40°C to 75°C
- **IPGS-0016-48V-E.....P/N: 8351-1272**
- 16 10/100/1000T w/16 PoE at/af up to 30W Industrial Ethernet Switch, dual 44V~56VDC input; -40°C to 75°C
- **IPGS-0016-14-48V-E.....P/N: 8351-1273**
- 16 10/100/1000T w/14 PoE at/af up to 30W Industrial Ethernet Switch, dual 44V~56VDC input; -40°C to 75°C

All part no. with WALL are models with wall mount kit instead of DIN Rail

OPTIONAL ACCESSORIES

DIN Rail Power

- **NDR-480 Series** 480W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2;
Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-240 Series** 240W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2;
Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-120 Series** 120W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ;
Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to
derating curve on NDR-120 Series datasheet)
- **NDR-75 Series** 75W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ;
Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to
derating curve on NDR-120 Series datasheet)

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2022 Copyright Lantech Communications Global Inc. all rights reserved.
 The revise authority rights of product specifications belong to Lantech Communications Global Inc.
 Lantech may make changes to specifications and product descriptions at anytime, without notice.