

I(P)GS-5416MGSFP

16 10/100/1000T (PoE at/af) + 4 1G/2.5G SFP L2+ Industrial Managed Ethernet Switch w/ Enhanced G.8032 Ring ; PXE ; 24V/48V/HV/WV

input models

- PoE model: Support IEEE802.3at/af up to 30W per port
- PoE model: PoE management incl. Detection and Scheduling
- Enhanced G.8032 ring covers multicast packets; MSTP 8 MSTI /RSTP; support MRP ring
- Miss-wiring avoidance & node failure protection
- Optional L3Lite/L3* to be upgradable
- Support PXE to verify switch firmware with the latest or certain version on server
- User friendly UI, including auto topology drawing and DDM threshold monitoring with dB values***; Complete CLI
- Support LACP link aggregation, IGMP v3/router port, DHCP server & DHCP Option82; Port based DHCP distribution, DHCP Snooping, Mac based DHCP server, MLD snooping, QoS by VLAN, SSH v2/SSL, HTTPS, INGRESS ACL L2/L3, TACACS+, QinQ
- Enhanced Environmental Monitoring for temp., voltage, current and total PoE load
- PoE model: Max PoE budget 120W @24V; 240W@48V
- USB port to backup, restore the configuration file and upgrade
- Wide range operation temperature (-E model):-40~75C/-40~167F
- EN50155/61373/50121-4/50121-3-2 verification
- E-marking certificate for vehicle application (24V model)



OVERVIEW

Lantech I(P)GS-5416MGSFP is a high performance L2+ (All Gigabit) Ethernet switch with 16 10/100/1000T + 4 1G/2.5G SFP (w/16 PoE 802.3at/af Ports) which provides advanced security function for network aggregation deployment. It delivers ITU G.8032 enhanced ring recovery less than 20ms in single ring. The QoS, advanced security including INGRESS ACL L2/L3, TACACS+, SSH v2/SSL and subnet VLAN, protocol VLAN and Mac based DHCP server, DHCP Option 82, DHCP server, IGMPv1/v2/v3/router port are supported and also required in large network. It also supports 10K Jumbo frames.

Up to 16 Poe at/af ports w/advanced PoE management (PoE model)

Compliant with 802.3at/af standard, the Lantech IPGS-5416MGSFP being able to feed each PoE port up to 30 Watt. Lantech IPGS-5416MGSFP supports advanced PoE management including PoE detection and scheduling. PoE detection can detect if the connected PD hangs then restart the PD; PoE scheduling is to allow pre-set power feeding schedule upon routine time table. Each PoE ports can be Enabled/disabled, get the voltage, current, Watt, and temperature info displayed on WebUI.

Miss-wiring avoidance, Loop protection, Node failure

protection

The I(P)GS-5416MGSFP also embedded several features for stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech I(P)GS-5416MGSFP being able to alert with the LED indicator and disable ring automatically. Node failure protection ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

DHCP option 82 & Port based, Mac based DHCP, Option66, DHCP Snooping, IPv6 DHCP server

DHCP server can assign dedicated IP address by MAC or by port (Port based for single switch), it also can assign IP address by port for multiple switches with single DHCP option82 server. DHCP Snooping is supported. For the ending device which need to download file from TFTP server, DHCP Option66 server can offer IP address of TFTP server to DHCP client. Basic IPv6 DHCP service can be supported.

User friendly GUI, Auto topology drawing

The user-friendly UI, innovative auto topology drawing and

topology demo makes I(P)GS-5416MGSFP much easier to get hands-on. The complete CLI enables professional engineer to configure setting by command line.

Enhanced G.8032 ring, 8 MSTI MSTP; MRP ring

Lantech I(P)GS-5416MGSFP features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering multicast packets. It also supports various ring topologies that covers enhanced ring and basic ring by easy setup than others. It supports MSTP that allows RSTP over VLAN for redundant links with 8 MSTI.

MRP (Media Redundancy Protocol) can be supported for industrial automation networks.

QoS by VLAN for legacy device

QoS by VLAN can allow switch to tag QoS by VLAN regardless the devices acknowledge QoS or not in which greatly enhance the bandwidth management in a network.

QinQ, QoS and GVRP supported

It supports the QinQ, QoS and GVRP for large VLAN segmentation.

Enhanced Storm control

Storm control prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on one of the physical interfaces and the detection is more precise and reaction is more efficient.

Optional L3Lite/L3* to be upgradable

Lantech OS3 is optional upgradable to L3 Lite for future expansion. The optional L3Lite includes editable routing table, VRRP, Router-on-a-stick, Inter-VLAN routing.

Support PXE to verify switch firmware with the latest or certain version

The switch can check its firmware version during booting time via PXE protocol. If switch finds any newer version, it will upload automatically.

IGMPv3, GMRP, router port, MLD Snooping, static multicast forwarding and multicast Ring protection

The unique multicast protection under enhanced G.8032 ring can offer immediate self-recovery instead of waiting for IGMP table timeout. It also supports IGMPv3, GMRP, MLD Snooping, router port and static multicast forwarding binding by ports for video surveillance application.

802.1X security by MAC address

MAC-based port authentication is an alternative approach to 802.1x for authenticating hosts connected to a port. By authenticating based on the host's source MAC address, the host is not required to run a user for the 802.1x protocol. The RADIUS server that performs the authentication will inform the switch if this MAC can be registered in the MAC address table of switch.

Editable configuration file

The configuration file of Lantech I(P)GS-5416MGSFP can be exported and edited with word processor for the other switches

configuration with ease. The factory reset button can restore the setting back to factory default and built-in watchdog design can automatically reboot the switch when CPU is found dead. The built-in watchdog design can automatically reboot the switch when CPU is found dead. I(P)GS-5416MGSFP also supports dual image firmware function.

2DI/2DO for relay contact and event alerting by email & traps

In case of event, the I(P)GS-5416MGSFP is able to send an email to pre-defined addresses as well as SNMP Traps out immediately. It provides 2DI and 2DO. When disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the alarm while sending alert information to IP network with email and traps.

Enhanced environmental monitoring for switch inside information

The enhanced environmental monitoring can detect switch overall temperature, total PoE load, voltage and current where can send the SNMP traps and email when abnormal.

Dual power 24V/48V input, high PoE budget

The Lantech I(P)GS-5416MGSFP is designed with dual power supply at 44~56VDC (48V model) or 12~57VDC input (24V model). The 48V model can have 240W PoE budget while 24V model can have 80W (12V input) or 120W (24V input) budget.

24V/HV/WV input voltage selection: At dual 9~36VDC (24V model) and 16.8~137.5VDC (WV model) or single 90~305VAC/120~430VDC (HV model)

The Lantech I(P)GS-5416MGSFP is able to work at dual 9~36VDC (24V model) or 16.8~137.5VDC (WV model). Or with single high power supply at 90~305VAC / 120~430VDC (HV model).

E-marking certificate

The E-marking certificate (24V model) makes it the most suitable switch for bus, carriage, other vehicles application as well as for industrial areas where the power source is limited with 24V but has demand of IP surveillance or VoIP applications.

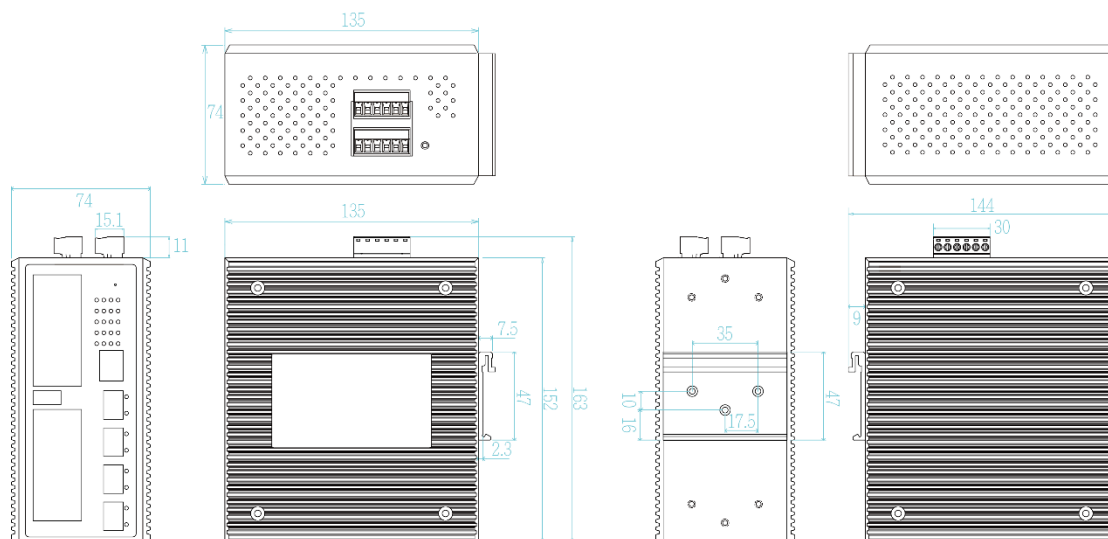
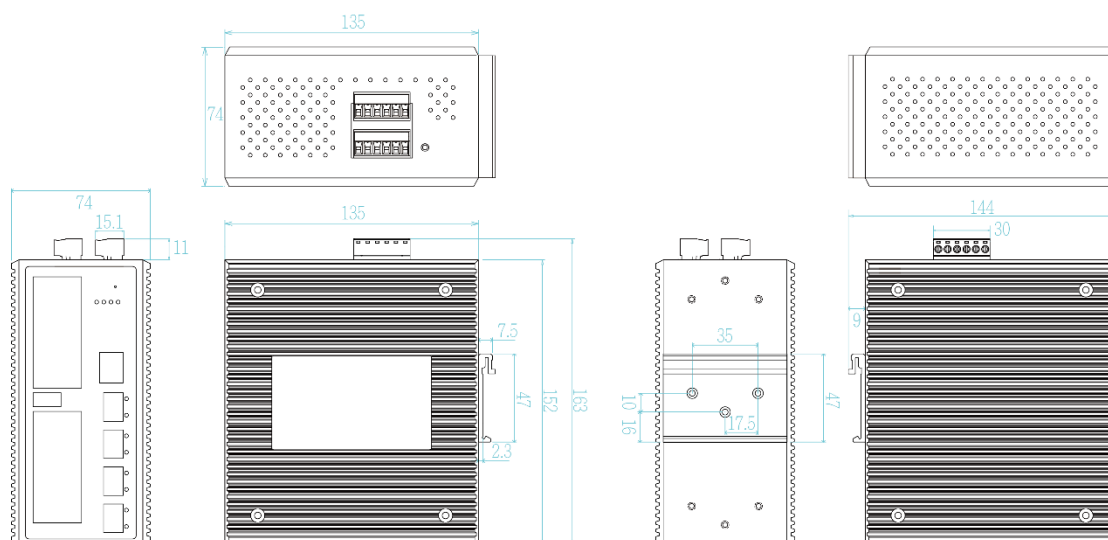
Industrial hardened design with high EFT and ESD protection

Lantech I(P)GS-5416MGSFP features high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in factory, substation, steel automation, aviation, mining and process control. Featured with relay contact alarm function, the I(P)GS-5416MGSFP is able to connect with alarm system in case of power failure or port disconnection. The I(P)GS-5416MGSFP also provides $\pm 2000V$ EFT and $\pm 4000VDC$ (Contact) / $\pm 8000VDC$ (Air) Ethernet ESD protection, which can reduce unstable situation caused by power line and Ethernet.

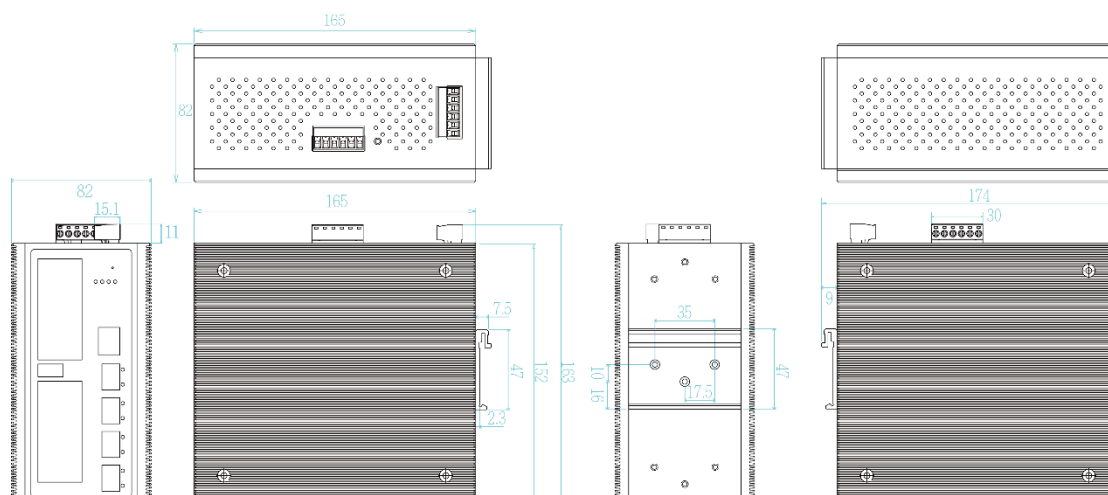
It is the best solution for Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory applications. The -E model can be used in extreme environments with an operating temperature range of -40°C to 75°C.

FEATURES & BENEFITS

- 16 100/1000T + 4 1G/2.5G SFP (w/16 PoE 802.3af/at ports) (Total 20 Ports Ethernet Switch)
- PoE model: Embedded 16 PoE ports IEEE802.3af/at function to feed power up to 30W for active mode operation
- PoE model: 48V input for PoE budget 240W; 24V input for PoE budget 120W
- PoE model: PoE management including PoE detection and scheduling for PD (power devices)
- Back-plane (Switching Fabric): 40Gbps
- 16K MAC address table
- DDM to support SFP diagnostic function***
 - Automatically convert the raw data into dB values for TX power/RX power, making it easier to measure the fiber distance
- 10KB Jumbo frame
- User friendly UI, auto topology drawing, topology demo, complete CLI for professional setting
- Enhanced G.8032 Ring protection in 20ms for single ring
 - Support various ring/chain topologies, including enhanced ring & basic ring
 - Enhanced G.8032 ring configuration with ease
 - Cover multicast and data packets protection
- Provides EFT protection ± 2000 VDC for power line.
- Supports ± 4000 VDC (Contact) and ± 8000 VDC (Air) Ethernet ESD protection
- Supports IEEE 802.1p Class of Service, per port provides 8 priority queues Port base, Tag Base and Type of Service Priority
- QoS by VLAN to prioritize all devices in the network
- IEEE 802.1d STP, IEEE 802.1w RSTP, 802.1s MSTP VLAN redundancy with 8 MSTI
- 4K 802.1Q VLAN, Port based VLAN, GVRP, QinQ, QoS
- Supports IEEE 802.1ab LLDP, Cisco CDP; LLDP info can be viewed via Web/ Console
- DHCP server / client / DHCP Option 82 relay / DHCP Option 82 server; Port based DHCP server; DHCP Snooping, DHCP Option 66; basic IPv6 DHCP server
- Mac based DHCP server to assign IP address that includes dumb switches in DHCP network
- Bandwidth Control
 - Ingress packet filter and egress rate limit
 - Broadcast/multicast packet filter control
- Relay alarm output system events
- Miss-wiring avoidance
 - LED indicator
- Node failure protection
 - Ensure the switches in a ring to survive after power breakout is back
- The status can be shown in NMS when each switch is back
- TFTP/ HTTP firmware upgrade
- System Event Log, SMTP** Email alert and SNMP Trap for alarm support; 32 RMON counters
- Security
 - SSL/SSH v2/INGRESS ACL L2/L3
 - MAC address table: MAC address entries/Filter/static MAC-Port binding
 - Remote Admin: IP address security management to prevent unauthorized intruder.
 - TACACS+
 - Login Security: IEEE802.1X/RADIUS
 - HTTPS for secure access to the web interface
- Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application
- IGMP router port to assign query in ring and for reversed multicast video flow
- IGMPv1, v2, v3 with Query mode for multi media
- Dual image firmware support
- Factory reset button to restore setting to factory default
- Watchdog design to auto reboot switch when CPU is found dead
- Quick system booting up time under 50 seconds
- Enhanced environmental monitoring for system input voltage, current, ambient temperature and total PoE load
- Supports DIDO (Digital Input/Digital Output)
- Diagnostic including Ping / ARP table / DDM information
- Support PXE to verify switch firmware with the latest or certain version
- Optional L3Lite/L3* to be upgradable
- E-marking certificate for vehicle application (24V model)
- MLD Snooping for IPv6 Multicast stream
- Dual DC input 9~36VDC (24V model); 44~56VDC (48V model); 16.8~137.5VDC (WV model); HV single input from 90~305VAC/120~430VDC (HV model)
- Enhanced Storm control
- Configuration backup and restoration
 - Supports text configuration file for system quick installation
 - USB port to upload/download firmware by USB dongle
- IP30 metal housing with DIN rail and Wall-mount** design

DIMENSIONS (unit=mm)
IPGS-5416MGSFP, 24V model / 48V model

IGS-5416MGSFP, 24V model


IGS-5416MGSFP, HV/ WV model



SPECIFICATION

Hardware Specification

Hardware Specification	
Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3z Gigabit fiber IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1s Multiple Spanning Tree IEEE802.3ad Link Aggregation Control Protocol (LACP) IEEE802.1AB Link Layer Discovery Protocol (LLDP) IEEE802.1X User Authentication (Radius) IEEE802.1p Class of Service IEEE802.1Q VLAN Tag IEEE802.3at/af Power over Ethernet
Switch Architecture	Back-plane (Switching Fabric): 40Gbps
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet / Gigabit Fiber port
Mac Address	16K MAC address table
Jumbo frame	10KB
Connectors	10/100/1000T: 16 x ports RJ-45 with Auto MDI/MDI-X function Mini-GBIC: 4 x 1G/2.5G SFP socket with DDM1 RS-232 connector: RJ-45 type USB x 1 Power & Relay connector: 1 x 6-pole terminal block DIDO: 1 x 6-pole terminal block
Network Cable	100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)
Optical Cable	1Gbps: Multi-mode: 0 to 550 m, 850 nm (50/125 μm); 0 to 2 km, 1310 nm (50/125 μm) Single mode: 0 to 10 km/ 30 km/ 40 km, 1310 nm (9/125 μm); 0 to 50 km/ 60 km/ 80km/ 120 km, 1550 nm (9/125 μm) 2.5Gbps Multi-mode: 0 to 300 m, 850 nm (50/125 μm); Single mode: 0 to 2 km/ 15 km/ 40 km, 1310 nm (9/125 μm); 0 to 40 km/ 80 km/ 100km, 1550 nm (9/125 μm) WDM 1Gbps: Single-mode: 0 to 10 km/ 20 km/ 40 km/ 60 km, 1310 nm (9/125 μm); 0 to 80 km, 1490 nm (9/125 μm); 0 to 10 km/ 20 km/ 40 km/ 60 km/ 80 km, 1550 nm (9/125 μm)

	WDM 2.5Gbps Single-mode: 0 to 5 km/ 20 km/ 40 km/ 60 km, 1310 /1550nm (9/125 μm); 0 to 80 km, 1490/1550 nm (9/125 μm)
LED	Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red); RM(Green) Ethernet port: Link/Activity (Green), Speed (Green); PoE: Link/Act (Green, PoE model); Mini-GBIC: Link/Activity (Green)
DI/DO	2 Digital Input (DI): Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output (DO): Open collector to 40 VDC, 200mA
Operating Humidity	5% ~ 95% (Non-condensing)
Operating Temperature	-20°C~60°C / -4°F~140°F (Standard model) -40°C~75°C / -40°F~167°F(-E model)
Storage Temperature	-40°C~85°C / -40°F~185°F
Power Supply	IPGS-5416MGSFP Dual DC input, 44~56VDC (48V model); Dual DC input, 9~36VDC (24V model) IGS-5416MGSFP Dual DC input, 9~36VDC (24V model) Dual DC input, 16.8~137.5VDC (WV model) Single HV input, 90~305VAC/120~430VDC (HV model)
PoE Budget (PoE model)	240W for 44~56V input (48V model) (54V input is recommended for PTZ or heater applications 80W at 12V input; 120W at 24V input (24V model) Higher PoE budget can be applied upon request. **
PoE pin assignment (PoE model)	RJ-45 port # 1~#16 support IEEE 802.3at/af End-point, Alternative A mode. Positive (VCC+): RJ-45 pin 1,2. Negative (VCC-): RJ-45 pin 3,6.
Power Consumption	Max. 21W
Case Dimension	Metal case. IP-30, 74 (W) x 135 (D) x 152 (H) mm (24V and 48V model) 74 (W) x 165 (D) x 152 (H) mm (HV and WV model)
Weight	900 g
Installation	DIN Rail and Wall Mount** Design
EMI & EMS	FCC Class A, CE EN55032 Class A, CE EN55024,

	CE EN61000-4-2, CE EN61000-4-3, CE EN61000-4-4, CE EN61000-4-5, CE EN61000-4-6, CE EN61000-4-8, CE EN61000-6-2
Railway compliance	EN50155:2017, EN50121-3-2:2015, EN50121-4:2015, EN61373:2010
Safety	EN IEC 62368-1
Stability Testing	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)
MTBF	586,057 hours (standards: IEC 62380)
Vehicle certificate	E13 marking (24V model)
Warranty	5 years
CPU Clock	1.6Ghz
RAM	512MB
NAND flash	512MB
Software Specification	
Management	SNMP v1 v2c, v3/ Web/Telnet/CLI
SNMP MIB	RFC 1213 MIBII RFC 1158 MIB RFC 1157 SNMP MIB RFC 1493 Bridge MIB* RFC 1573 IF MIB RFC 2674 Q-Bridge MIB* RFC 2819 RMON MIB Private MIB
ITU G.8032	Support ITU G.8032 v2/2012 for Ring protection in less than 20ms for self-heal recovery (single ring enhanced mode) Support basic single ring & enhanced ring Enhanced G.8032 ring configuration with ease Cover multicast & data packets protection
PoE Management (PoE model)	PoE Detection to check if PD hangs then restart the PD
Per Port PoE Status (PoE model)	On/ Off, voltage, current, watts, temperature
User friendly UI	- Auto topology drawing - Topology demo - Auto configuration for G.8032(auto mode*) for single ring - DDM threshold monitoring with dB values*** - Complete CLI for professional setting
Port Trunk with LACP	LACP Port Trunk: 8 Trunk groups
LLDP	Supports LLDP to allow switch to advise its identification and capability on the LAN
CDP	Cisco Discovery Protocol for topology mapping
Enhanced Environmental Monitoring	System status for input voltage, current, total PoE load and ambient temperature to be shown in GUI and sent alerting if any abnormal status
VLAN	Port Based VLAN IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096.) GVRP, QinQ, QoS, Protocol based VLAN; IPv4 Subnet based VLAN
Spanning Tree	Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree 8 MSTI
Quality of Service	The quality of service determined by port, Tag and IPv4 Type of service, IPv4 Differentiated Services Code Points - DSCP
Class of Service	Support IEEE802.1p class of service, per port provides 8 priority queues
QoS by VLAN	Tagged QoS by VLAN for all devices in the network
Remote Admin	Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder
Login Security	Supports IEEE802.1X Authentication/RADIUS
Port Mirror	Support 3 mirroring types: "RX, TX and Both packet"
Network Security	Support 10 IP addresses that have permission to access the switch management and to prevent

	unauthorized intruder. 802.1X access control for port based and MAC based authentication/static MAC-Port binding Ingress L2/L3 SSL/ SSH v2 for Management HTTPS for secure access to the web interface TACACS+ for Authentication
IGMP	Support IGMP snooping v1, v2, v3; 1024 multicast groups; IGMP router port; IGMP query; GMRP
Static multicast forwarding	Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application
Bandwidth Control	Support ingress packet filter and egress packet limit. The egress rate control supports all of packet type. Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet. The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress packet limit.
Flow Control	Supports Flow Control for Full-duplex and Back Pressure for Half-duplex
System Log	Supports System log record and remote system log server
SMTP**	Supports SMTP** Server and 8 e-mail accounts for receiving event alert
Relay Alarm	Provides one relay output for port breakdown, power fail and alarm. Alarm Relay current carry ability: 1A @ DC24V
Protection	- Miss-wiring avoidance - Node failure protection - Loop protection
SNMP Trap	Up to 10 trap stations; trap types including: - Device cold start - Authorization failure - Port link up/link down - DI/DO open/close - Typology change (ITU ring) - Power failure - Environmental abnormal
DHCP	Provide DHCP Client/ DHCP Server/DHCP Option 82 (Client & Server)/Port based DHCP; DHCP Snooping, DHCP Option 66; basic IPv6 DHCP server
MLD Snooping	Support IPv6 Multicast stream
Mac based DHCP Server	Assign IP address by Mac that can include dumb switch in DHCP network
DNS	Provide DNS client feature and support Primary and Secondary DNS server.
PXE	PXE to verify switch firmware with the latest or certain version
Enhanced Storm Control	prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on one of the physical interfaces
Optional L3Lite/L3*	Lantech OS3 is optional upgradable to L3 Lite/L3* for future expansion. The optional L3Lite includes editable routing table, VRRP, Router-on-a-stick, Inter- VLAN routing.
Diagnostic	Support Ping, ARP table and DDM information
SNTP	Supports SNTP to synchronize system clock in Internet
Firmware Update	Supports TFTP firmware update, TFTP backup and restore; HTTP firmware upgrade
Configuration upload and download	Supports editable configuration file for system quick installation; Support factory reset button to restore all settings back to factory default; USB for auto restore/backup.
Dual Image Firmware	Support dual image firmware function

*Future release

**Optional

***Optional DDM SFP required

ORDERING INFORMATION

- **IPGS-5416MGSFP-16-48V.....P/N: 8350-860**
16 10/100/1000T PoE at/af up to 30W + 4 1G/2.5G Dual Speed SFP L2+ Industrial Managed Ethernet Switch; -20°C to 60°C; Enhanced Environmental Monitoring; dual 44~56VDC input; PoE budget 240W
- **IPGS-5416MGSFP-16-48V-E.....P/N: 8350-861**
16 10/100/1000T PoE at/af up to 30W + 4 1G/2.5G Dual Speed SFP L2+ Industrial Managed Ethernet Switch; -40°C to 75°C; Enhanced Environmental Monitoring; dual 44~56VDC input; PoE budget 240W
- **IPGS-5416MGSFP-16-24V.....P/N: 8350-8762**
16 10/100/1000T PoE at/af up to 30W + 4 1G/2.5G Dual Speed SFP L2+ Industrial Managed Ethernet Switch; -20°C to 60°C; Enhanced Environmental Monitoring; dual 9~36VDC input, PoE budget 80W at 12V, 120W at 24V
- **IPGS-5416MGSFP-16-24V-E.....P/N: 8350-8763**
16 10/100/1000T PoE at/af up to 30W + 4 1G/2.5G Dual Speed SFP L2+ Industrial Managed Ethernet Switch; -40°C to 75°C; Enhanced Environmental Monitoring; dual 9~36VDC input, PoE budget 80W at 12V, 120W at 24V
- **IGS-5416MGSFP-24V.....P/N: 8350-8764**
16 10/100/1000T + 4 1G/2.5G Dual Speed SFP L2+ Industrial Managed Ethernet Switch; -20°C to 60°C; Enhanced Environmental Monitoring; dual 9~36VDC input
- **IGS-5416MGSFP-24V-E.....P/N: 8350-8765**
16 10/100/1000T + 4 1G/2.5G Dual Speed SFP L2+ Industrial Managed Ethernet Switch; -40°C to 75°C; Enhanced Environmental Monitoring; dual 9~36VDC input
- **IGS-5416MGSFP-HV.....P/N: 8350-878**
16 10/100/1000T + 4 1G/2.5G SFP L2+ Industrial Managed Ethernet Switch; -20°C to 60°C; Enhanced Environmental Monitoring; single high power 90~305VAC / 120~430VDC
- **IGS-5416MGSFP-HV-E.....P/N: 8350-879**
16 10/100/1000T + 4 1G/2.5G SFP L2+ Industrial Managed Ethernet Switch; -40°C to 75°C; Enhanced Environmental Monitoring; single high power 90~305VAC / 120~430VDC
- **IGS-5416MGSFP-WV.....P/N: 8350-8781**
16 10/100/1000T + 4 1G/2.5G SFP L2+ Industrial Managed Ethernet Switch; -20°C to 60°C; Enhanced Environmental Monitoring; dual input 16.8VDC~137.5VDC
- **IGS-5416MGSFP-WV-E.....P/N: 8350-8791**
16 10/100/1000T + 4 1G/2.5G SFP L2+ Industrial Managed Ethernet Switch; -40°C to 75°C; Enhanced Environmental Monitoring; dual input 16.8VDC~137.5VDC

OPTIONAL ACCESSORIES

Software package

- **OS3 – L3L..... P/N: 9000-114**
OS3 software platform with Layer 3 Lite functions (please check Lantech software data sheet for details)
- **OS3 – L3*..... P/N: 9000-116**
OS3 software platform with Layer 3 functions (please check Lantech software data sheet for details)

48~54VDC DIN Rail Power for 802.3at Applications

- **NDR-480 Series** 480W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-240 Series** 240W Single Output Industrial Din Rail Power, 90-264VAC / 127~370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-120 Series** 120W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to derating curve on NDR-120 Series datasheet)

Mini GBIC (SFP)

- | | | | |
|-----------------------|--|-----------------------|---|
| ■ 8330-162-V1 | MINI GBIC 1000SX (LC/0.5km) Transceiver | ■ 8330-187-V1 | LTSFP-1000BX-20KM Transceiver (WDM 1550) |
| ■ 8330-163-V1 | MINI GBIC 1000SX2 (LC/2km) Transceiver | ■ 8330-180-V1 | LTSFP-1000BX-40KM Transceiver (WDM 1310) |
| ■ 8330-165-V1 | MINI GBIC 1000LX (LC/10km) Transceiver | ■ 8330-182-V1 | LTSFP-1000BX-40KM Transceiver (WDM 1550) |
| ■ 8340-0591-V1 | MINI GBIC 1000LHX (LC/40km) Transceiver | ■ 8330-181-V1 | LTSFP-1000BX-60KM Transceiver (WDM 1310) |
| ■ 8330-166-V1 | MINI GBIC 1000XD (LC/50km) Transceiver | ■ 8330-183-V1 | LTSFP-1000BX-60KM Transceiver (WDM 1550) |
| ■ 8330-169-V1 | MINI GBIC 1000XD (LC/60km) Transceiver | ■ 8330-184-V1 | LTSFP-1000BX-80KM Transceiver (WDM 1490) |
| ■ 8330-167-V1 | MINI GBIC 1000ZX (LC/80km) Transceiver | ■ 8330-185-V1 | LTSFP-1000BX-80KM Transceiver (WDM 1550) |
| ■ 8330-170-V1 | MINI GBIC 1000EZ (120km) Transceiver | ■ 8330-262D-V1 | MINI GBIC 2.5G 850nm VCSEL (LC/0.3km) Transceiver |
| ■ 8330-168-V1 | MINI GBIC 1000T (100m) Transceiver | ■ 8330-263D-V1 | MINI GBIC 2.5G 1310nm FP (LC/2km) Transceiver |
| ■ 8330-188-V1 | LTSFP-1000BX-10KM Transceiver (WDM 1310) | ■ 8330-265D-V1 | MINI GBIC 2.5G 1310nm DFB (LC/15km) Transceiver |
| ■ 8330-189-V1 | LTSFP-1000BX-10KM Transceiver (WDM 1550) | | |
| ■ 8330-186-V1 | LTSFP-1000BX-20KM Transceiver (WDM 1310) | | |

All SFP ended with D are with Diagnostic function

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2022 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.