

## Lantech OS3/OS4 Switches

Complete Layer 2 management switch with optional software package  
of IEC 62443, L3 Lite, L3, NAT, and IEC 61375-2-5 ETBN



### OVERVIEW

Lantech OS3/OS4 switch is powerful with complete Layer 2 management features and optional upgradable for future expansion, such as Layer 3 Lite, Layer 3, IEC61375-2-5 (ETBN), R-NAT, hardware NAT, PTP, etc.

#### ***DDoS security to protect switch and server; Optional IEC 62443 compliance with free one year service***

Lantech OS3/4 platform is designed with high standard of cybersecurity to prevent the threats from network attack such as DDoS attacks and 802.1X security authentication. The optional cybersecurity IEC 62443 features include DHCP snooping, prevention of DDoS attack, Dynamic ARP Inspection, IPSource Guard, Port Security, Vulnerability checking, Encrypted file, Public keys, Strength password, Account management, Penetration and Stress test, and many more with up to 90 security measures.

MAC-based port authentication is an alternative approach to 802.1x for authenticating hosts connected to a port. By authenticating based on the host's source MAC address, the host is not required to run a user for the 802.1x protocol. The RADIUS server that performs the authentication will inform the switch if this MAC can be registered in the MAC address table of switch.

#### ***Optional IEEE 1588 PTP V2 and 802.1AS for precise time protocol (OS4 only)***

The Precision Time Protocol (PTP) is a protocol used to synchronize clocks throughout a network. The PTP V2 and gPTP supports transparent clock and two step processing that improves network time accuracy and precision.

#### ***DHCP option 82 & Port based, Mac based DHCP, Option 7/66, DHCP Snooping, IPv6 DHCP basic server***

DHCP server can assign dedicated IP address by MAC or by port (Port based for single switch), it also can assign IP address by port for multiple switches with single DHCP option82 server. DHCP Snooping is supported. DHCP option66 server can offer IP address of TFTP server to DHCP client for VOIP application while DHCP option7 can offer IP address of logging server. Basic Ipv6 DHCP service can be supported.

#### ***User friendly GUI, Auto topology drawing***

The user-friendly UI, innovative auto topology drawing and topology demo makes OS3/OS4 Ethernet switches much easier to get hands-on. The complete CLI enables professional engineer to configure setting by command line.

#### ***Enhanced G.8032 ring, 8 MSTI MSTP; MRP ring***

Lantech OS3/OS4 Ethernet switches features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering multicast packets. It also supports various ring topologies that covers enhanced ring and basic ring by easy setup than others. It supports MSTP that allows RSTP over VLAN for redundant links with 8 MSTI. MRP (Media Redundancy Protocol) can be supported for industrial automation

networks.

### ***Enhanced Storm control***

Storm control prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on one of the physical interfaces and the detection is more precise and reaction is more efficient.

### ***Protocol based VLAN; Subnet based VLAN; QinQ, QoS and GVRP***

It supports the QinQ, QoS and GVRP for large VLAN segmentation. The protocol-based VLAN processes traffic based on protocol. It filters IP traffic from nearby end-stations using a particular protocol such as IP, IPX, ARP or other Ethernet-types in a Hex value. Subnet based VLANs group traffics into logical VLANs based on the source IP address and IP subnet. The above features can help to build VLAN in the network mixed with managed and un-managed switch as to define packets to which VLAN group based on protocol or subnet.

### ***IGMPv3, GMRP, router port, MLD Snooping, static multicast forwarding and multicast Ring protection***

The unique multicast protection under enhanced G.8032 ring can offer immediate self-recovery instead of waiting for IGMP table timeout. It also supports IGMPv3, GMRP, router port, MLD snooping and static multicast forwarding binding by ports for video surveillance application.

### ***Support NTP, SNTP server with built-in RTC clock source (RTC is subject to model variant)***

The support of NTP/SNTP is able to synchronize system clock in Internet. Lantech OS3/OS4 switch supports NTP server & server/client mode. The switch also built-in a real-time clock (RTC) for measurement the passage of time with a NTP server. (RTC is subject to model variant)

### ***Enhanced environmental monitoring for switch inside information***

The enhanced environmental monitoring can detect switch overall temperature, total power load, actual input voltage and current. It can send the SNMP traps alert when abnormal. (Subject to model variant)

### ***Optional Layer3 Lite / Layer3 to be upgradable***

Lantech OS3/OS4 platform is optional upgradable to L3 Lite or L3 for future expansion. The optional L3L/L3 supports enhanced routing functionality, including RIP v1/v2, OSPF, DVMRP, PIM, Static NAT, PAT, Port forwarding, etc. It provides better network performance for large scale applications. (NAT is only available on OS4-L3 platform)

### ***Optional TTDP and R-NAT protocol for train application (EN50155 models)***

Lantech OS3/OS4 platform complies with IEC 61375-3-4 (ECN) standard. The support of Ethernet Consist Network allows interconnection between end devices located in single consist of train and interoperability with IEC61375-2-5 (ETBN). The optional TTDP (Train Topology Discovery Protocol) can assign IP and Gateway IP automatically when train network topology is changed due to the adjustment of train cars. Exclusive DHCP and VLAN over TTDP can help bind device with certain IP assignment and segment VLAN in ECN network. The optional R-NAT (Railway-Network Address Translation) is under TTDP that simplifies the management of network address translation between ETB and ECN. (R-NAT is only available on OS4-L3 platform)

## L2 SPECIFICATIONS

### Manageability / Network

|                                 |                                                                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Management                      | SNMP v1 v2c, v3/ Web/ Telnet/ CLI                                                                                                                                                                                                                                                                    |
| User friendly UI                | <ul style="list-style-type: none"> <li>Auto topology drawing</li> <li>Topology demo</li> <li>Complete CLI for professional setting</li> </ul>                                                                                                                                                        |
| SNMP MIB                        | <ul style="list-style-type: none"> <li>MIBII</li> <li>MIB</li> <li>SNMP MIB</li> <li>Bridge MIB</li> <li>IF MIB</li> <li>RMON MIB</li> <li>Private MIB</li> </ul>                                                                                                                                    |
| SNMP Trap                       | Up to 5 trap stations; trap types including: <ul style="list-style-type: none"> <li>Device cold start</li> <li>Authorization failure</li> <li>Port link up/link down</li> <li>DI/DO open/close</li> <li>Typology change (ITU ring)</li> <li>Power failure</li> <li>Environmental abnormal</li> </ul> |
| Firmware Update                 | Supports TFTP firmware update, TFTP backup and restore; HTTP firmware upgrade; USB firmware update                                                                                                                                                                                                   |
| Configuration import and export | Supports editable configuration file for system quick installation; Support factory reset ping to restore all settings back to factory default                                                                                                                                                       |
| DHCP                            | Provide DHCP Client/ DHCP Server/DHCP Option 82/Port based DHCP; DHCP Snooping, DHCP Option 66; DHCP Option 7/66/61/PXE; basic IPv6 DHCP server; IPv6 port based DHCP                                                                                                                                |
| Mac based DHCP Server           | Assign IP address by Mac in DHCP network                                                                                                                                                                                                                                                             |
| DNS                             | Provide DNS client feature and can set Primary and Secondary DNS server                                                                                                                                                                                                                              |
| System Log                      | Supports System log record and remote system log server                                                                                                                                                                                                                                              |
| PXE                             | Offer IP address of TFTP server                                                                                                                                                                                                                                                                      |
| LLDP                            | Supports LLDP to allow switch to advise its identification and capability on the LAN                                                                                                                                                                                                                 |
| CDP                             | Cisco Discovery Protocol for topology mapping                                                                                                                                                                                                                                                        |
| Remote Admin                    | Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder                                                                                                                                                                                   |

### Redundancy / Protection

|               |                                                                                                                                                                                                                                                                                                                                   |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ITU G.8032    | <ul style="list-style-type: none"> <li>Support ITU G.8032 for Ring protection in less than 20ms for self-heal recovery (single ring enhanced mode)</li> <li>Support basic single ring &amp; enhanced ring</li> <li>Enhanced G.8032 ring configuration with ease</li> <li>Cover multicast &amp; data packets protection</li> </ul> |
| Spanning Tree | Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree 8 MSTI; Supports BPDU guard/Root guard/Aggregation port                                                                                                                                                                   |
| Protection    | <ul style="list-style-type: none"> <li>Miss-wiring avoidance</li> <li>Node failure protection</li> <li>Loop protection</li> </ul>                                                                                                                                                                                                 |

### PoE (PoE models)

|                     |                                                        |
|---------------------|--------------------------------------------------------|
| PoE Management      | PoE Detection to check if PD hangs then restart the PD |
| Per Port PoE Status | On/ Off, voltage, current, watts, temperature          |

### Security

|                                 |                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IEC62443 Cybersecurity ready*** | <ul style="list-style-type: none"> <li>Cybersecurity</li> <li>Vulnerability checking</li> <li>Identification and authentication</li> <li>Resource availability</li> </ul>                                                                                                                                                                              |
| Prevention of DDoS/DoS attack   | <ul style="list-style-type: none"> <li>Suspicious Packets DoS/DDoS Attacks</li> <li>Network DoS/DDoS Attacks</li> </ul>                                                                                                                                                                                                                                |
| Network Security                | Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder.<br>802.1X access control for port based and MAC based authentication/static MAC-Port binding<br>Ingress/Egress ACL L2/L3<br>SSL/SSH v2 for Management<br>HTTPS for secure access to the web interface<br>TACACS+ for Authentication |
| Login Security                  | Supports IEEE802.1X Authentication/RADIUS                                                                                                                                                                                                                                                                                                              |

### Switching

|      |                                                                                                                                                                                       |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| VLAN | Port Based VLAN<br>IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096)<br>GVRP, QinQ, QoS (Max 32 entries; Max 7 entries when QoS by VLAN) |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                | Protocol based VLAN<br>Ipv4 Subnet based VLAN                                                                                                                                                                                                                                                                                                                                                                                                                        |
| IGMP                           | Support IGMP snooping v1, v2, v3;<br>Supports IGMP static route; 1024<br>multicast groups; IGMP router port;<br>IGMP query; GMRP                                                                                                                                                                                                                                                                                                                                     |
| MLD Snooping                   | Support Ipv6 Multicast stream                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Static multicast<br>forwarding | Static multicast forwarding forward<br>reversed IGMP flow with multicast<br>packets binding with ports for IP<br>surveillance application                                                                                                                                                                                                                                                                                                                            |
| <b>QoS</b>                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Quality of<br>Service          | The quality of service determined by<br>port, Tag and Ipv4 Type of service, Ipv4<br>Differentiated Services Code Points –<br>DSCP                                                                                                                                                                                                                                                                                                                                    |
| Class of<br>Service            | Support IEEE802.1p class of service,<br>per port provides 8 priority queues                                                                                                                                                                                                                                                                                                                                                                                          |
| Bandwidth<br>Control           | Support ingress packet filter and egress*<br>packet limit.<br>The egress* rate control supports all of<br>packet type.<br>Ingress filter packet type combination<br>rules are Broadcast/Multicast/Flooded<br>Unicast packet, Broadcast/Multicast<br>packet, Broadcast packet only and all<br>types of packet.<br>The packet filter rate can be set an<br>accurate value through the pull-down<br>menu for the ingress packet filter and<br>the egress* packet limit. |
| Port Trunk with<br>LACP        | LACP Port Trunk: 8 Trunk groups                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Port</b>                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Port Mirror                    | Support 3 mirroring types: "RX, TX and<br>Both packet"                                                                                                                                                                                                                                                                                                                                                                                                               |

|                                         |                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Enhanced<br>Storm Control               | prevents traffic on a LAN from being<br>disrupted by a broadcast, multicast, or<br>unicast storm on one of the physical<br>interfaces                                                                                                                                                                                     |
| <b>System</b>                           |                                                                                                                                                                                                                                                                                                                           |
| Enhanced<br>Environmental<br>Monitoring | System status for actual input voltage,<br>current, total power load and ambient<br>temperature to be shown in GUI and<br>sent alerting if any abnormal status                                                                                                                                                            |
| Dual Image<br>Firmware                  | Support dual image firmware function                                                                                                                                                                                                                                                                                      |
| <b>Time Management</b>                  |                                                                                                                                                                                                                                                                                                                           |
| NTP/SNTP                                | Supports NTP/SNTP to synchronize<br>system clock in Internet<br>Supports NTP server & server/client<br>mode<br>NTP server support Primary and Backup<br>in client mode<br>Support NTP Time Re-correct without<br>battery<br>Built-in RTC clock can be clock source<br>for NTP server (RTC is subject to model<br>variant) |
| PTP/gPTP**<br>(OS4 only)                | IEEE 1588 PTP V2 & 802.1AS;<br>Transparent clock and two step<br>processing                                                                                                                                                                                                                                               |
| Diagnostic                              | Support Ping, ARP table and DDM<br>information                                                                                                                                                                                                                                                                            |
| <b>Train Protocol (EN50155 models)</b>  |                                                                                                                                                                                                                                                                                                                           |
| ECN                                     | Complies with IEC 61375-3-4 (ECN)<br>standard.                                                                                                                                                                                                                                                                            |

\*Future release

\*\*Optional

\*\*\*Annual license

## Upgradable Package

**L3L & L3 SPECIFICATIONS****Unicast Routing**

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RIP v1/v2<br>(L3 only) | Support RIP Redistribute <ul style="list-style-type: none"> <li>Static routes</li> <li>Route-map</li> <li>Metric</li> </ul> Support Enhanced Redistributing Routing Protocols <ul style="list-style-type: none"> <li>Between routing protocols (RIP, OSPF, EIGRP, BGP).</li> <li>Directly connected routes can be redistributed into a routing protocol.</li> <li>Support OSPF and RIP running simultaneously in the same system (but need to be in different interfaces)</li> </ul> Support Equal-cost multi-path routing (ECMP) for RIP |
| OSPF                   | Support OSPF Area <ul style="list-style-type: none"> <li>Standard Area</li> <li>Stub Area</li> <li>Stub no-summary Area</li> </ul> Support Equal-cost multi-path routing (ECMP)                                                                                                                                                                                                                                                                                                                                                           |
| Static Route           | Up to 32                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

**Multicast Routing**

|                                      |                                                                                                                                                                                             |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DVMRP<br>(L3 only)                   | Distance Vector Multicast Routing Protocol (DVMRP) is a routing protocol used to share information between routers to facilitate the transportation of IP multicast packets among networks. |
| PIM (Protocol Independent Multicast) | PIM-SM (Sparse Mode)<br>PIM-BSR (Bootstrap)<br>PIM-DM (Dense Mode)                                                                                                                          |

PIM-SSM (Source-Specific Multicast Mode)

**Routing**

|      |                                                                                 |
|------|---------------------------------------------------------------------------------|
| VRRP | For Routing Redundancy<br><br>Combine Max. 2 gateways as single virtual gateway |
|------|---------------------------------------------------------------------------------|

**VLAN**

|                    |                                                                     |
|--------------------|---------------------------------------------------------------------|
| Inter-VLAN routing | Support dynamic routing and static routing                          |
| Router-on-a-stick  | Route traffic between different VLAN groups via VLAN trunking port. |

**NAT\*\* (OS4-L3 only)**

|                                |                                                            |
|--------------------------------|------------------------------------------------------------|
| Hardware NAT                   | Max 384 clients                                            |
| Static NAT                     | Max 128 connections; 1 to 1                                |
| PAT (port address translation) | Max 256 connections; 1 to many; many to 1; Port forwarding |

**Train (EN50155 models)**

|                       |                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------|
| TTDP**                | TTDP (Train Topology Discovery Protocol) complies with IEC 61375-2-5 (ETBN) standard. |
| DHCP for TTDP**       | Support Option 66/82                                                                  |
| R-NAT** (OS4-L3 only) | Support Railway-Network Address Translation                                           |

**Others**

|               |                                                                                           |
|---------------|-------------------------------------------------------------------------------------------|
| Rescue mode   | Offer repairing ability to repair operating system if booting image of switch is damaged. |
| IP based port | Support                                                                                   |

\*Future release


\*\*Optional

## PLATFORMS COMPARISON

|                                            | Layer 3               | Layer 3 Lite<br>OS4 / OS3 | Layer 2 +             | OS2                   | OS1                      |
|--------------------------------------------|-----------------------|---------------------------|-----------------------|-----------------------|--------------------------|
| Unicast Routing: RIP v1/v2                 | •                     |                           |                       |                       |                          |
| Multicast Routing: DVMRP                   | •                     |                           |                       |                       |                          |
| Hardware NAT: Static NAT (OS4 only)        | •                     |                           |                       |                       |                          |
| Hardware NAT: PAT (OS4 only)               | •                     |                           |                       |                       |                          |
| R-NAT** (OS4 only, built-in IEC 61375-2-5) | •**                   |                           |                       |                       |                          |
| Multicast Routing: PIM (DM)                | •                     | •                         |                       |                       |                          |
| Multicast Routing: PIM (SSM)               | •                     | •                         |                       |                       |                          |
| Multicast Routing: PIM (SM)                | •                     | •                         |                       |                       |                          |
| Multicast Routing: PIM (BSR)               | •                     | •                         |                       |                       |                          |
| Unicast Routing: OSPF                      | •                     | •                         |                       |                       |                          |
| VRRP                                       | •                     | •                         |                       |                       |                          |
| VLAN routing                               | •                     | •                         |                       |                       |                          |
| Static Route                               | •                     | •                         |                       |                       |                          |
| Rescue Mode                                | •                     | •                         |                       |                       |                          |
| TTDP (IEC 61375-2-5)**                     | •**                   | •**                       |                       |                       |                          |
| IP based port                              | •                     | •                         |                       |                       |                          |
| Static Unicast Routing                     | •                     | •                         |                       |                       |                          |
| DHCP pool with per VLAN                    | •                     | •                         |                       |                       |                          |
| DHCP for TTDP**                            | •**                   | •**                       |                       |                       |                          |
| PTP** (OS4 only)                           | •**                   | •**                       |                       |                       |                          |
| Prevention of DDoS/DoS attack              | •                     | •                         | •                     |                       |                          |
| Dynamic ARP Inspection                     | •                     | •                         | •                     |                       |                          |
| IPSource Guard                             | •                     | •                         | •                     |                       |                          |
| Port Security                              | •                     | •                         | •                     |                       |                          |
| Remote admin-IP security (25)              | •                     | •                         | •                     |                       |                          |
| MRP                                        | •                     | •                         | •                     |                       | •                        |
| Protocol Based                             | •                     | •                         | •                     |                       |                          |
| Subnet Based                               | •                     | •                         | •                     |                       |                          |
| MLD Snooping                               | •                     | •                         | •                     |                       |                          |
| Port Monitoring                            | •                     | •                         | •                     |                       |                          |
| PXE application                            | •                     | •                         | •                     |                       |                          |
| IP v6 DHCP Server (Basic)                  | •                     | •                         | •                     |                       |                          |
| Dual Image                                 | •                     | •                         | •                     |                       |                          |
| ARP inspection                             | •                     | •                         | •                     |                       | •                        |
| BPDUGuard                                  | •                     | •                         | •                     |                       | •                        |
| QinQ                                       | •                     | •                         | •                     |                       | •                        |
| Remote admin (limitation of accessing way) | •                     | •                         | •                     | •                     | •                        |
| GVRP                                       | •                     | •                         | •                     | •                     | •                        |
| SSL                                        | •                     | •                         | •                     | •                     | •                        |
| Login Security (TACACS+)                   | •                     | •                         | •                     | •                     | •**                      |
| Login Security (RADIUS)                    | •                     | •                         | •                     | •                     | port authentication only |
| Dual Homing                                | •                     | •                         | •                     | •                     | •                        |
| SSH                                        | •                     | •                         | •                     | •                     | •                        |
| CDP                                        | •                     | •                         | •                     | •                     | •                        |
| Topology View                              | •                     | •                         | •                     | •                     | •                        |
| Environment Monitoring                     | •                     | •                         | •                     | •**                   | •**                      |
| MSTP                                       | •                     | •                         | •                     | •                     | •                        |
| Loop Protection                            | •                     | •                         | •                     | •                     | •                        |
| IGMP router port                           | •                     | •                         | •                     | •                     | •                        |
| GMRP                                       | •                     | •                         | •                     | •                     | •                        |
| VLAN based QoS                             | •                     | •                         | •                     | •                     | •                        |
| MAC based DHCP                             | •                     | •                         | •                     | •                     | •                        |
| Option82 DHCP Relay                        | •                     | •                         | •                     | •                     | •                        |
| Option 7/66                                | •                     | •                         | •                     | option 66 only        | option 66 only           |
| DHCP Snooping                              | •                     | •                         | •                     | •                     | •                        |
| Digital Input/ Output                      | •                     | •                         | •                     | •                     | •                        |
| Triggered by event of environment          | •                     | •                         | •                     | •**                   | •**                      |
| Triggered by event of SFP DDM              | •                     | •                         | •                     | •                     | •                        |
| Ping                                       | •                     | •                         | •                     | •                     | •                        |
| ARP                                        | •                     | •                         | •                     | •                     | •                        |
| QoS under 61375-3-4                        | •                     | •                         | •                     | •                     | •                        |
| Proprietary redundant protocol             | ITU-Ring Enhance mode | ITU-Ring Enhance mode     | ITU-Ring Enhance mode | ITU-Ring Enhance mode | ITU-Ring Enhance mode    |
| ACL                                        | Ingress only          | Ingress only              | Ingress only          | Ingress Only          | •                        |
| SNMP Trap                                  | •                     | •                         | •                     | •                     | •                        |
| Firmware upgrading                         | WEB/TFTP/FTP          | WEB/TFTP/FTP              | WEB/TFTP/FTP          | WEB/TFTP/FTP          | WEB/TFTP/FTP             |
| Configuration file import/export           | WEB/TFTP/FTP          | WEB/TFTP/FTP              | WEB/TFTP/FTP          | WEB/TFTP/FTP          | WEB/TFTP/FTP             |
| G.8032 standard                            |                       |                           |                       |                       | •                        |
| Auto Provision                             |                       |                           |                       |                       | •                        |

## ORDER INFORMATION

- **OS3 – L3L..... P/N: 9000-114**  
OS3 software platform upgrade to Layer 3 Lite platform
- **OS3 – IEC61375-2-5..... P/N: 9000-115**  
OS3 software platform with IEC-61375-2-5 ETBN (Ethernet Train Backbone Networks) function
- **OS3 – L3..... P/N: 9000-116**  
OS3 software platform with Layer 3 functions incl. L3L
- **OS4 – L3L..... P/N: 9000-110**  
OS4 software platform upgrade to Layer 3 Lite platform
- **OS4 – L3L – IEC61375-2-5.....P/N: 9000-111**  
OS4 software platform with IEC-61375-2-5 ETBN (Ethernet Train Backbone Networks) function (under L3L)
- **OS4 – L3..... P/N: 9000-112**  
OS4 software platform with Layer 3 functions incl. L3L
- **OS4 – L3 – IEC61375-2-5.....P/N: 9000-118**  
OS4 software platform with IEC-61375-2-5 ETBN (Ethernet Train Backbone Networks) function w/ R-NAT (under L3)

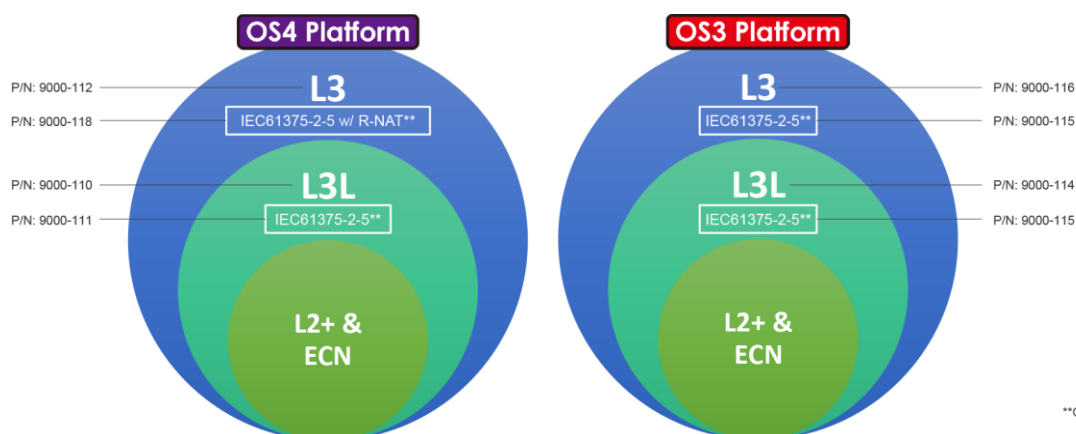

Lantech Communications Global Inc.  
www.lantechcom.tw  
info@lantechcom.tw

© 2023 Copyright Lantech Communications Global Inc. all rights reserved.  
The revise authority rights of product specifications belong to Lantech Communications Global Inc.  
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.