

W15IAD7T-OFA2

15.6" Intel® Core™ i9/i7/i5/i3 (Alder Lake S) Open Frame Panel PC



KEY FEATURES

- 15.6" 1366 x 768 Resolution Open Frame PC
- 12th Gen Intel® Core™ Alder Lake S i9 / i7/ i5 / i3 processor
- 2 x SODIMM, DDR5 4800MHz, support up to 64GB (Max. 32GB for each slot)
- Integrated Dual 2.5 Gigabit Ethernet
- Multi display supports DP 1.4a / HDMI 2.0b (Optional)
- Multiple I/Os, 2 x USB 3.2 Gen2x1, 2 x Serial Ports
- 12 V DC Power input




SPECIFICATIONS

Display			
Resolution	1366x768	Size	15.6 inches
Contrast Ratio	500:1	Panel Brightness	400.0 nits
View Angles	85,85,80,80	Active Area	344.232x195.536 mm
Touch / Glass	Resistive Touch Screen (Optional) Protection Glass w/o Touch Function (Optional)		
System Specification			
WLAN	Support (Optional)	BT	Support (Optional)
Processor	Intel® Core™ i5-12500TE(up to 4.3GHz) Intel® Core™ i9-12900TE(up to 4.80GHz) (Optional) Intel® Core™ i7-12700TE(up to 4.6GHz) (Optional) Intel® Core™ i3-12100TE(up to 4.00GHz) (Optional)	Chipset	Intel® Q670E Intel® H610E (Optional) Intel® R680E (Optional)
Memory	2 x SO-DIMM, DDR5 4800 MHz, 8GB 16GB (Optional) 32GB (Optional) 64GB (Optional)	Storage	1 x M.2 2280 M-Key NVMe SSD 128GB 256GB (Optional) 512GB (Optional) 1TB (Optional) 2TB (Optional) 4TB (Optional) 2 x SATA III for 2.5" SSD/HDD (Only R680E/Q670E version support)(RAID support) (Optional)
Ethernet controller	2 x Intel® Ethernet Controller	Security	TPM 2.0
Operating System	Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 22.04 (Optional)		
Mechanical			
Dimension	366.3 x 248 x 68.5 mm	Weight	3.6 kg
Mounting	Open Frame Panel Mount VESA Mount	Enclosure	Metal Housing
Cooling System	Fan design		
Environment			
Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C

Storage Temperature	-10°C to 60°C		
Certification			
Certification	CE, FCC		
IO Ports			
Power Input	1 x 12V DC, Din4 pin connector	USB Port	4 x USB 3.2 Gen2x1 (10Gbps, TypeA) (R680E/Q670E version) 4 x USB 3.2 Gen1x1 (5Gbps, TypeA) (H610E version)
Serial Port	1 x RS232/422/485 (Default RS232) 1 x RS232	Video	1 x DP1.4a DP++ , Max resolution up to 4096x2160@60Hz 1 x HDMI 2.0b , Max resolution up to 4096x2160@60Hz (Optional)
Audio	Mic in Line out	Expansion Port	1 x M.2 2280 M-Key Slot (for NVME SSD) 1 x M.2 2230 E-Key Slot (for Wi-Fi module)
LAN	2 x 2.5 Giga LAN RJ45 Connector		
Control			
Button	1 x Power Button 1 x Reset Button		
Accessory			
Accessory	100~240V AC to DC Adapter Power Cord VESA screws		
Power			
Power Rating	12V DC	Adapter	12V 220W

DIMENSIONS UNIT:MM

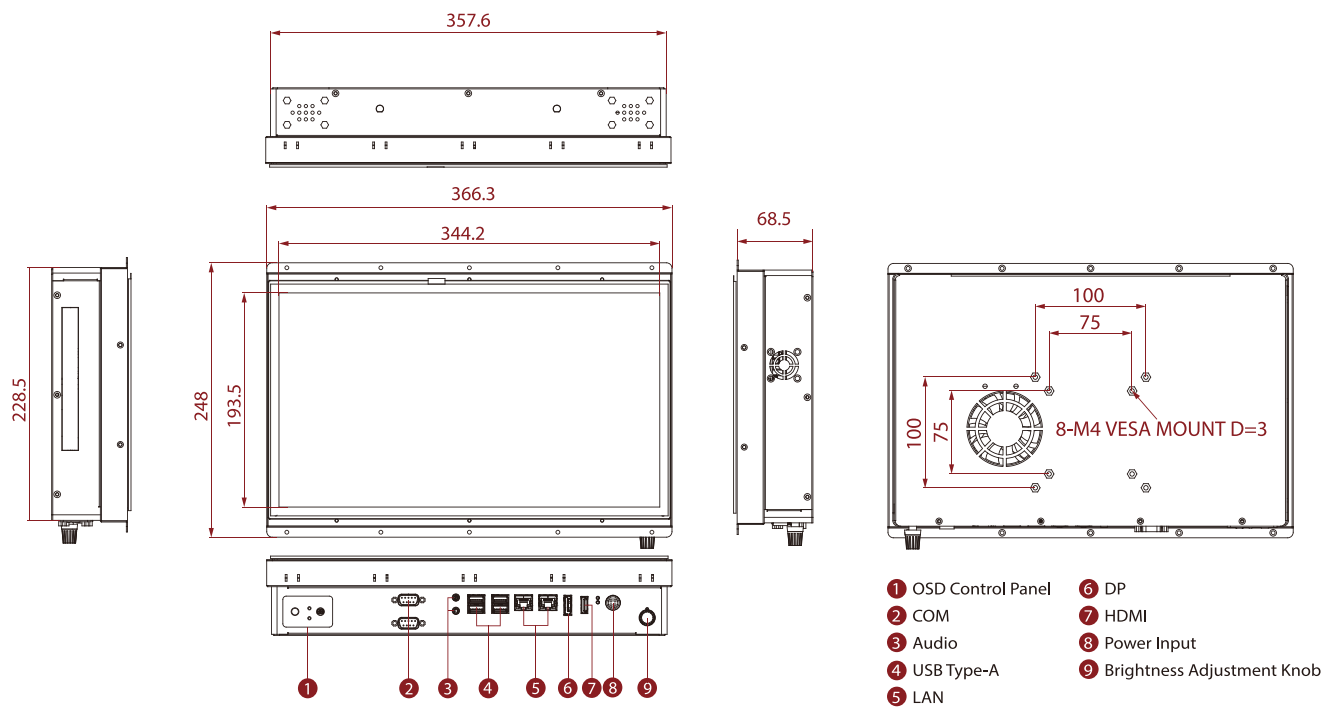

NOTE

- 1.This is a simplified drawing and some components are not marked in detail.
- 2.Please contact our sales representative if you need further product information.
- 3.All specifications are subject to change without prior notice.
- 4.The product shown in this datasheet is a standard model.For diagrams that contain customized or optional I/ O, please contact the Winmate Sales Team for more information.

