


UL3J Series - 86" webOS UHD Signage

86UL3J-N

Key Features

- Brightness(Typ.) : 330 nits
- Resolution : ULTRA HD (3,840 x 2,160)
- webOS-based High Performance
- Built-in Speaker
- Compatible with LG's One:Quick Share
- Compatible with AV Control Systems

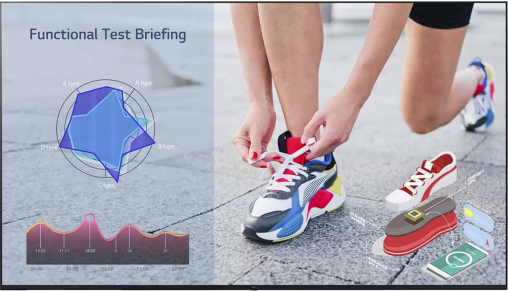

Compatible with **LG One:Quick** Share

All Spec

PANEL

Screen Size (Inch)	86"	Panel Technology	ADS
Back Light Type	Direct	Aspect Ratio	16:9
Native Resolution	3840x2160 (UHD)	Refresh Rate	120Hz
Brightness	330nit (Typ.)	Contrast Ratio	1,400:1
Dynamic CR	1,000,000:1	Color Gamut	DCI 80%
Viewing Angle (H x V)	178x178	Color Depth (Number of Colors)	Advanced 8bit, 1.07 Billion colors
Response Time	8ms (G to G)	Surface Treatment (Haze)	1%
Life time	30,000Hrs (Min)	Operation Hours (Hours/Day)	16/7
Portrait / Landscape	Yes / Yes		

MECHANICAL SPECIFICATION

Bezel Color	Ashed Blue	Bezel Width	Off : 6.9/6.9/6.9/18.4 On : 15.9/15.9/15.9/19.9
Weight (Head)	45.2	Packed Weight	57.7
Monitor Dimensions (W x H x D)	1927 x 1104 x 59.9	VESA Standard Mount Interface	600 x 400

Carton Dimensions (W x H x D)

2115 x 1215 x 228

ENVIRONMENT CONDITIONS

Operation Temperature	Operation Humidity
0 °C to 40 °C (Portrait Scene : 0 °C to 35 °C)	10 % to 80 %

POWER

Power Supply	Power Type
AC 100-240V~, 50/60Hz	Built-In Power

POWER CONSUMPTION

BTU (British Thermal Unit)	DPM
751 BTU/Hr(Typ.), 1024 BTU/Hr(Max.)	0.5W
Power off	
0.5W	

SOUND

Speaker (Built-in)
Yes

CERTIFICATION

Safety	EMC
CB	FCC Class "A" / CE
ERP / Energy Star	ePEAT(US only)
Yes (OldErP for Jordan) / No	Yes

SOFTWARE COMPATIBILITY

SuperSign CMS	SuperSign Control+
Yes	Yes
SuperSign WB	
Yes	

LANGUAGE

OSD
English, French, German, Spanish, Italian, Korean , Chinese(Simplified), Chinese(Original), Portugues(Brazil), Swedish, Finnish, Norwegian, Danish, Russian, Japanese, Portugues(Europe), Dutch, Czech, Greek, Turkiye, Arabic, polski

ACCESSORY

Basic
Remote Controller(include battery 2ea), Power Cord, Regulation Book, Phone to D-Sub9 Gender, Cable Holder

