R19L300-RMM1

19" Rear Mount Display

KEY FEATURES

- 19", 1280 x 1024
- VGA and HDMI input
- Rear mount
- VESA mount

INTRODUCTION

Winmate Rear Mount Display Series offers durable and versatile display solutions for industrial applications. Available in sizes from 6" to 19", these rectangular displays feature sunlight-readable high-brightness options, wide operating temperature ranges (-20~60°C), and flexible mounting with rear and VESA mount compatibility. With VGA and HDMI inputs and optional resistive touch or cover glass, these displays ensure intuitive operation and seamless integration into control systems, kiosks, and other industrial environments.

SPECIFICATIONS

Display

Resolution	1280x1024	**Size**	19.0 inches
Contrast Ratio	1000:1	**Panel Brightness**	250.0 nits
Display Color	16.7M Colors	**View Angles**	85,85,80,80
Active Area	376.32x301.06 mm	**Touch / Glass**	Resistive Touch Screen Protection Glass w/o Touch Function (Optional) SAW Touch (Surface Acoustic Wave) (Optional)

Environment

Operating Humidity	10% to 90% RH, Non-Condensing	**Operating Temperature**	0°C to 50°C
Storage Temperature	-10°C to 60°C		

Certification

Certification	CE, FCC

IO Ports

USB Port	1 x USB for Touch Screen	**Video**	1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional)
Audio	Audio line in (3.5mm) (Optional) 2 x Speaker (Optional)		

Mechanical

Dimension	482.6 x 399 x 61 mm	**Weight**	8.2 kg
Mounting	VESA Mount/ Panel Mount	**Enclosure**	Metal
Cooling System	Fanless Design		

Accessory

WINMATE
No. 18, Zhongxing S. St., Sanchong Dist., New Taipei City 241017 , Taiwan (R.O.C.)
Tel: +886-2-8511-0288
Website: www.winmate.com

Revised:V.230825.250617

Accessory	1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)	**Optional Accessory**	Remote Controller (Optional,Varies by product)

Power

Power Rating	12V DC in 24V DC in (optional)

Control

Button	5 Keys: - , + , Power , Esc , Enter

DIMENSIONS UNIT:MM

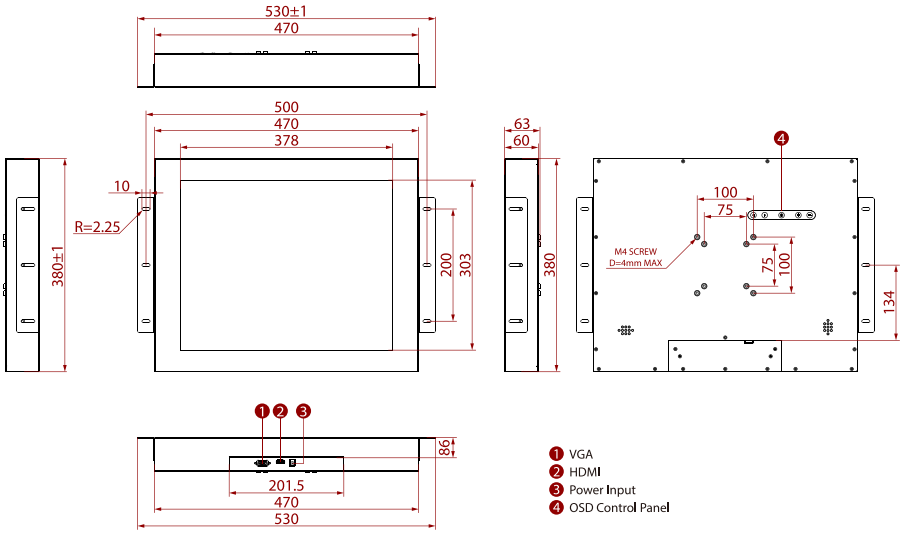

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.