

S17L500-RMM1

17" Rear Mount Display



CE

FCC

KEY FEATURES

- 17", 1280 x 1024 Rear Mount Display
- VGA and HDMI input
- Rear mount
- VESA mount

INTRODUCTION

Winmate Rear Mount Display Series offers durable and versatile display solutions for industrial applications. Available in sizes from 6" to 19", these rectangular displays feature sunlight-readable high-brightness options, wide operating temperature ranges (-20~60°C), and flexible mounting with rear and VESA mount compatibility. With VGA and HDMI inputs and optional resistive touch or cover glass, these displays ensure intuitive operation and seamless integration into control systems, kiosks, and other industrial environments.

SPECIFICATIONS

Display

Resolution	1280x1024	Size	17.0 inches
Contrast Ratio	1000:1	Panel Brightness	350.0 nits
Display Color	16.2M Colors	View Angles	85,85,80,80
Active Area	337.920x270.336 mm	Touch / Glass	Resistive Touch Screen Protection Glass w/o Touch Function (Optional) SAW Touch (Surface Acoustic Wave) (Optional)

Environment

Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C
Storage Temperature	-10°C to 60°C		

Certification

Certification	CE, FCC
---------------	---------

IO Ports

USB Port	1 x USB for Touch Screen	Video	1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional)
Audio	Audio line in (3.5mm) (Optional) 2 x Speaker (Optional)		

Mechanical

Dimension	480 x 340 x 61 mm	Mounting	VESA Mount/ Panel Mount
Enclosure	Metal	Cooling System	Fanless Design

Accessory

Accessory	1 x VGA cable	Optional Accessory	Remote Controller (Optional,Varies by product)
-----------	---------------	--------------------	--

1 x HDMI cable
100~240V AC to DC Adapter
Power Cord
Manual
VESA screws(Varies by product)


Power

Power Rating 12V DC in
24V DC in (optional)

Control

Button 5 Keys: -, +, Power, Esc, Enter

DIMENSIONS UNIT:MM

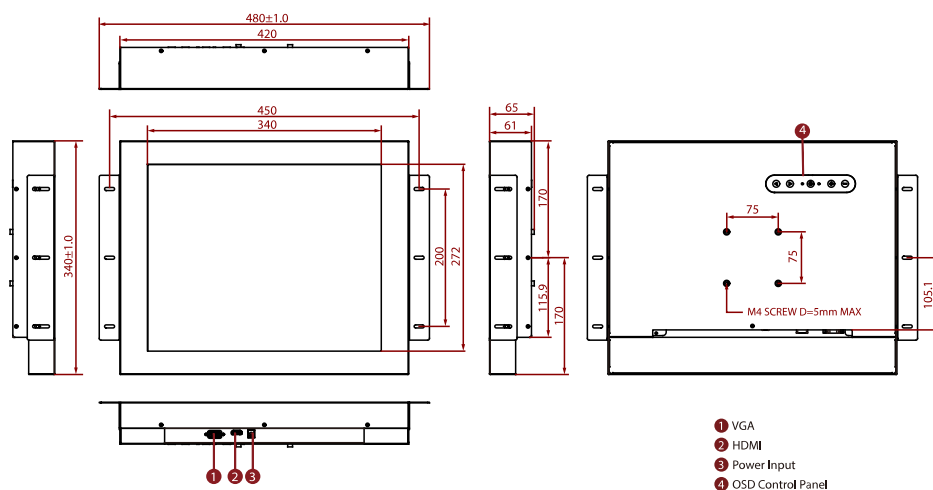

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.